
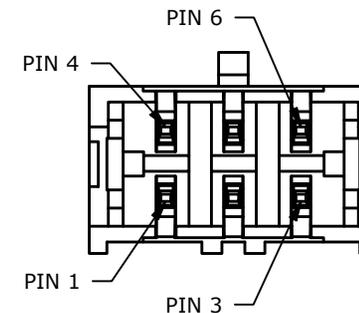
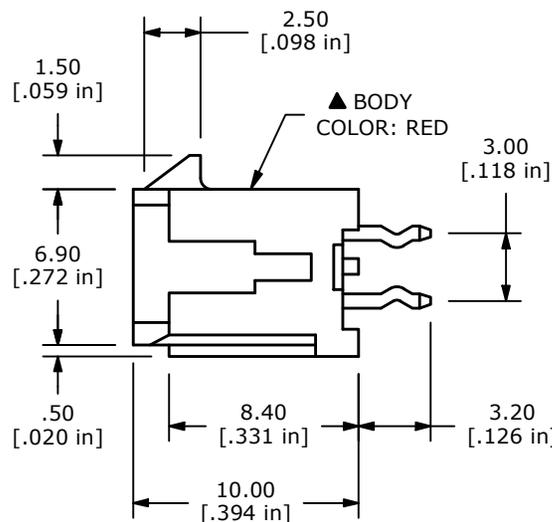
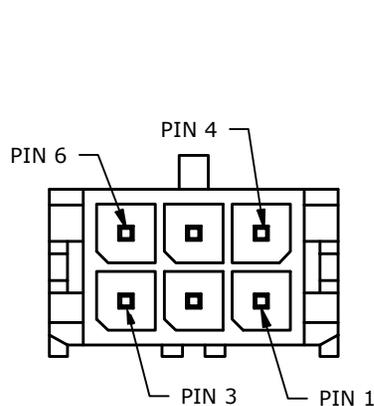
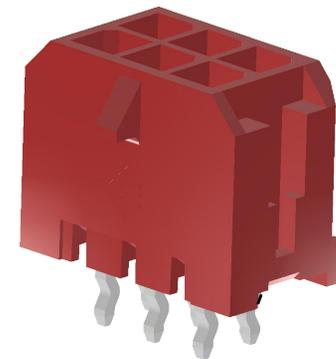


PCB LAYOUT

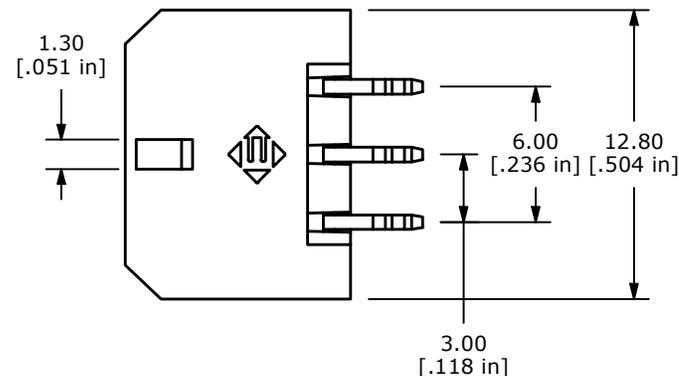

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. VOLTAGE RATING: 250 VAC
5. CURRENT RATING 5A MAX.
6. MATERIAL: PA66, UL94V-0
- ▲ 7. POLES: 1-6
8. MATING CONNECTORS: SEE DATASHEET
9. CONTACT RESISTANCE: 0.015mΩ MAX.
10. INSULATION RESISTANCE: 1000MΩ MIN. @500VDC
11. TERMINAL/CONTACT MATERIAL: TIN PLATED
12. ▲ DENOTES CRITICAL PARAMETER
13. OPERATING TEMP: -25°C TO 85°C

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-102530	RELEASE	07/09/24	JS



OBJECT ID  
100126987

TITLE ECM302606R				
SCALE 3:1	DATE 3/8/2024	DR JS	DWG ECM302606R	REV A