

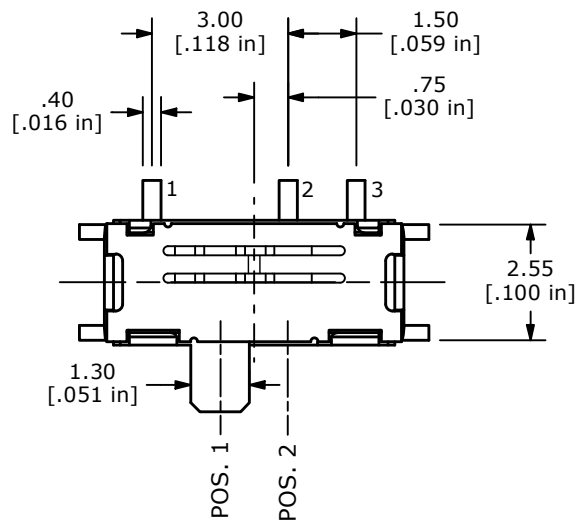
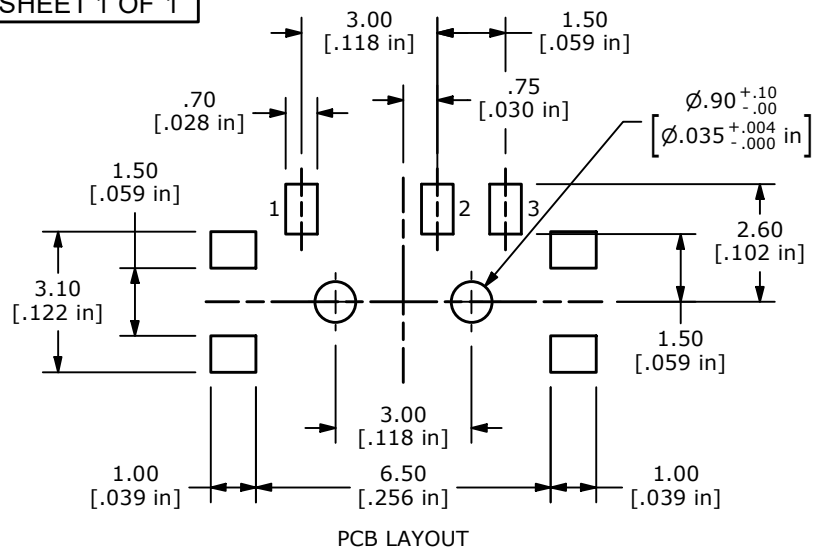



	POS. 1	POS. 2
FUNCTION		
SPDT	ON	ON
TERMINAL CLOSURE	1-2	2-3

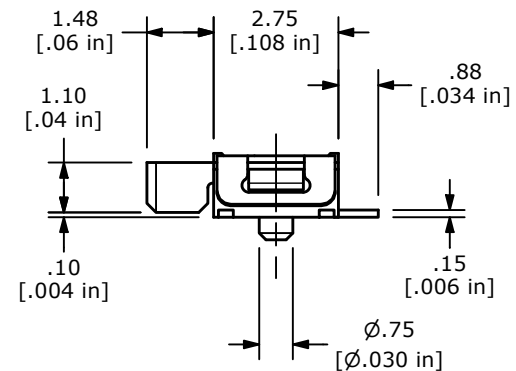

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X = ± 0.4
X.XX = ± 0.10
4. RATING: 4VDC @ 0.3A
5. TRAVEL: 1.5 ± 0.15 mm
6. OPERATING FORCE: 150 ± 70 gf
7. ELECTRICAL LIFE: 10,000 CYCLES MIN.
8. CONTACT RESISTANCE: 70m Ω MAX.
9. INSULATION RESISTANCE: 100M Ω AT 100 VDC
10. DIELECTRIC STRENGTH: 100VAC
11. OPERATING TEMPERATURE: -20°C to +70°C
12. ▲ DENOTES CRITICAL PARAMETER

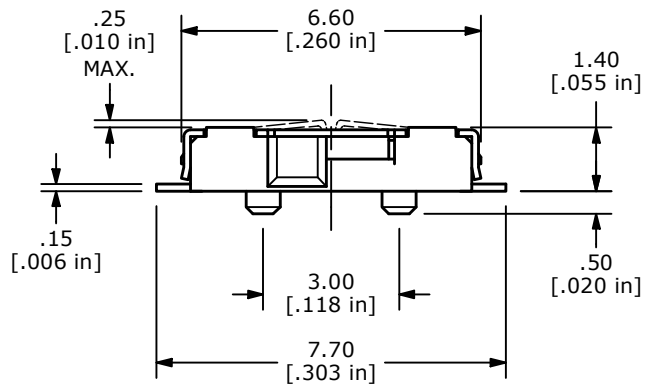

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
G	ECO-102380	UPDATE DRAWING	12/08/23	MW						000020085
					TITLE EG1257					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 6:1	DATE 8/27/1997	DR MM	DWG P112221	REV G	