
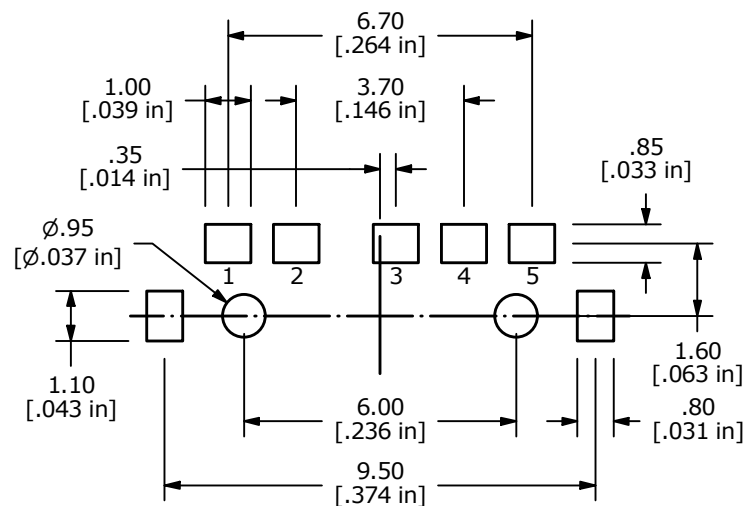
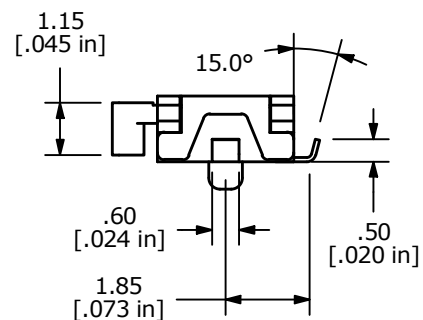
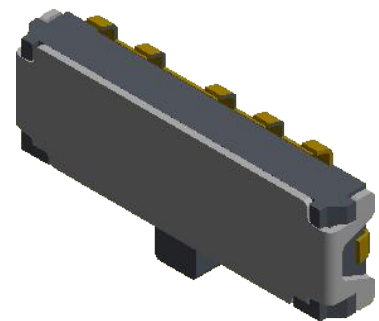
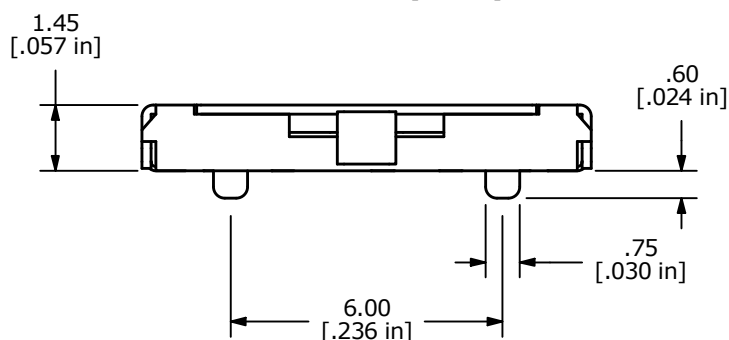


CIRCUIT DIAGRAM
ON - ON - (ON)

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X $\pm$ 0.4
X.XX $\pm$ 0.25
4. RATING: 30mA @ 15VDC
5. TRAVEL: 1.5 $\pm$ 0.2 FROM EACH POSITION TO THE NEXT POSITION
- ▲ 6. OPERATING FORCE: 150 $\pm$ 100gF
7. ELECTRICAL LIFE: 5,000 CYCLES MIN.
8. CONTACT RESISTANCE: 1 Ω MAX.
9. INSULATION RESISTANCE: 10M Ω AT 250 VDC
10. DIELECTRIC STRENGTH: 100VAC
11. OPERATING TEMPERATURE: -10°C to +60°C
12. STORAGE TEMPERATURE: -25°C to +85°C
12. ▲ DENOTES CRITICAL PARAMETER

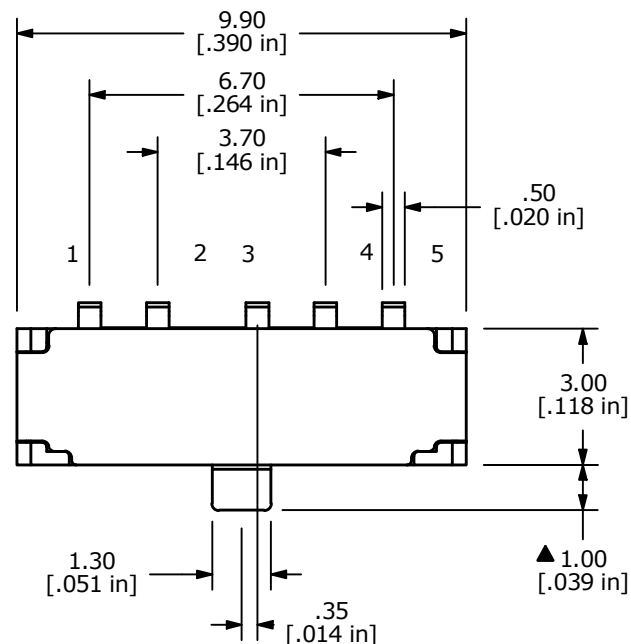

A	24401	NEW RELEASE	7/16/20	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE EG1312AR

SCALE 6:1

DATE 7/16/2020

DR MJR

DWG N013120

REV A