


SHEET 1 OF 1

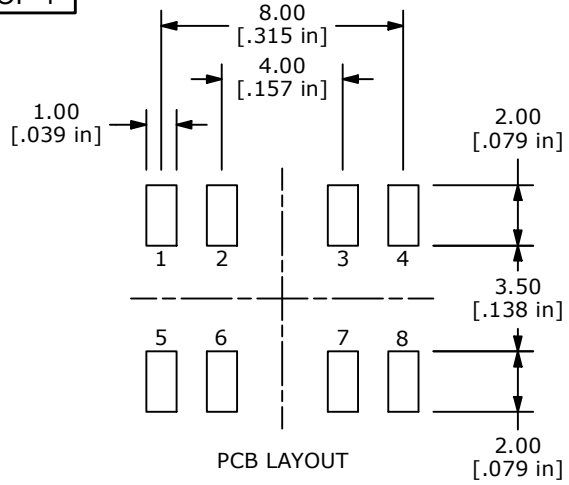


PCB LAYOUT

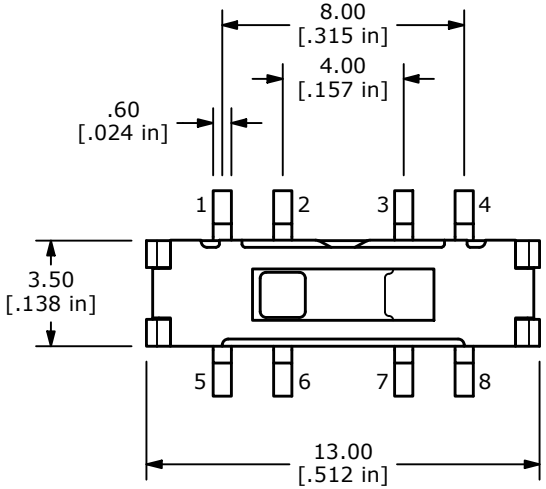


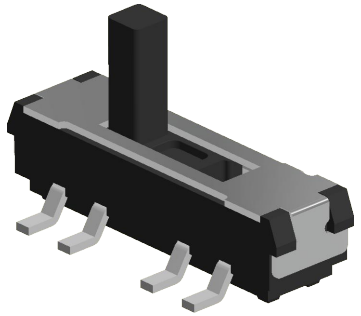


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	ON	ON
1-3, 5-7	2-3, 6-7	3-4, 7-8

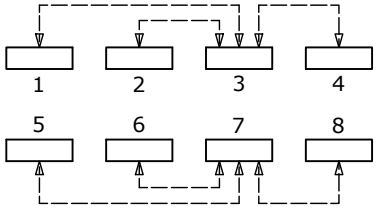

CIRCUIT DIAGRAM

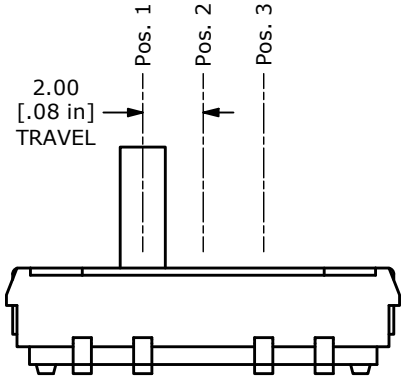

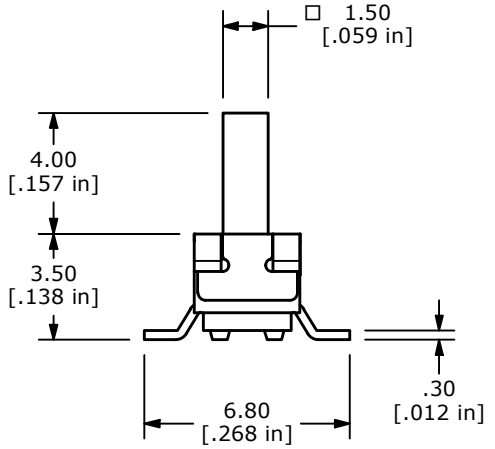

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
4. RATING: DC 12V 0.1A
5. TRAVEL: 2.0mm ±0.2mm
6. OPERATING FORCE: 250 ± 100gf
7. ELECTRICAL LIFE: 5,000 CYCLES
8. CONTACT RESISTANCE: 100mΩ Max.
9. INSULATION RESISTANCE: 100MΩ Min.
10. OPERATING TEMPERATURE: -40˚C to +85˚C
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103882	Print update	01/12/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 100131520

TITLE EG2374

SCALE	DATE	DR	DWG	REV
4:1	12/3/2025	MW	P123740	B