


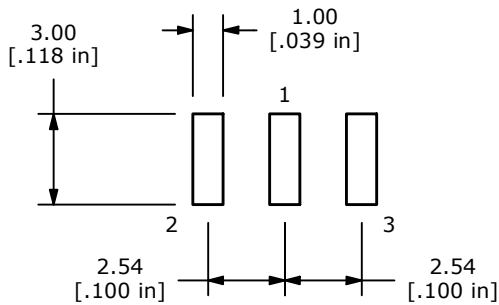

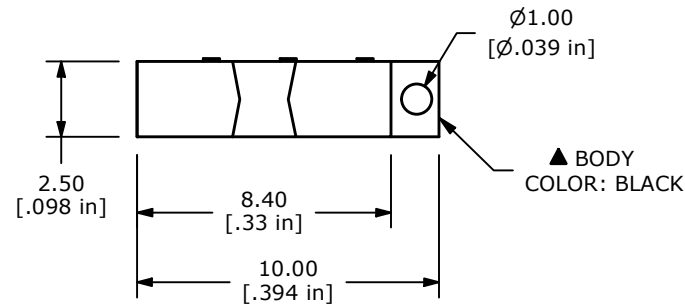


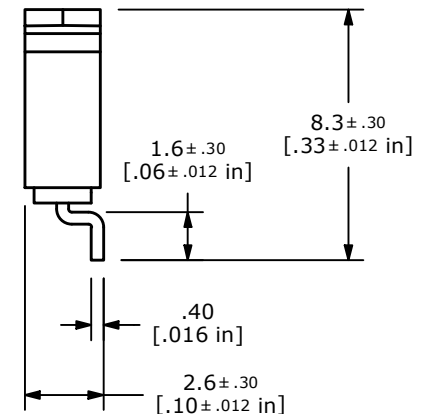

PCB LAYOUT

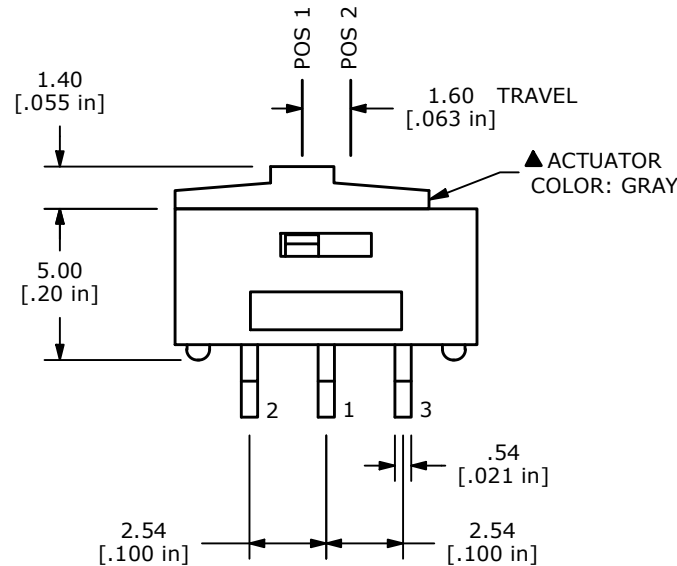

SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-3	1-2



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. CONTACT RATING: 0.5A @ 12VDC
0.3A @ 24VDC
5. OPERATING FORCE: 250 ±150gf
6. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE.
7. TRAVEL: 1.60 ±0.1mm
8. CONTACT RESISTANCE: 30mΩ MAX. (INITIAL)
9. INSULATION RESISTANCE: 10,000MΩ MIN. @500VDC
10. ELECTRICAL LIFE: 2,000 CYCLES
MECHANICAL LIFE: 10,000 CYCLES
11. CONTACT AND TERMINAL MATERIAL: GOLD PLATED
12. ▲ DENOTES CRITICAL PARAMETER
13. OPERATING TEMP: -40°C TO 85°C
14. STORAGE TEMP: -40°C TO 85°C
15. PACKAGING: 200pcs BAG

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID			
A	ECO-102666	RELEASE	07/10/24	JS						100127379			
					TITLE EGJ1210AAG2								
					SCALE 4:1		DATE 5/7/2024		DR JS		DWG U300003		REV A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED													