

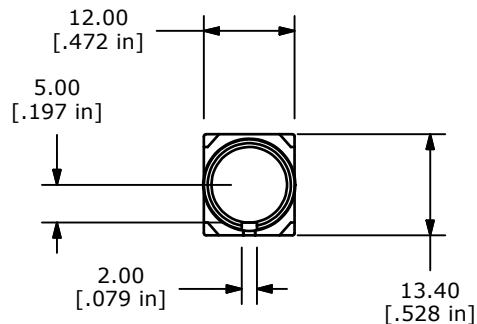
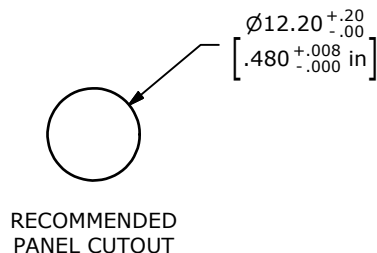
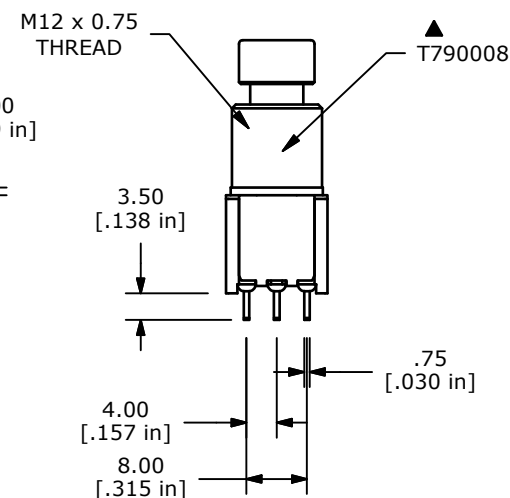
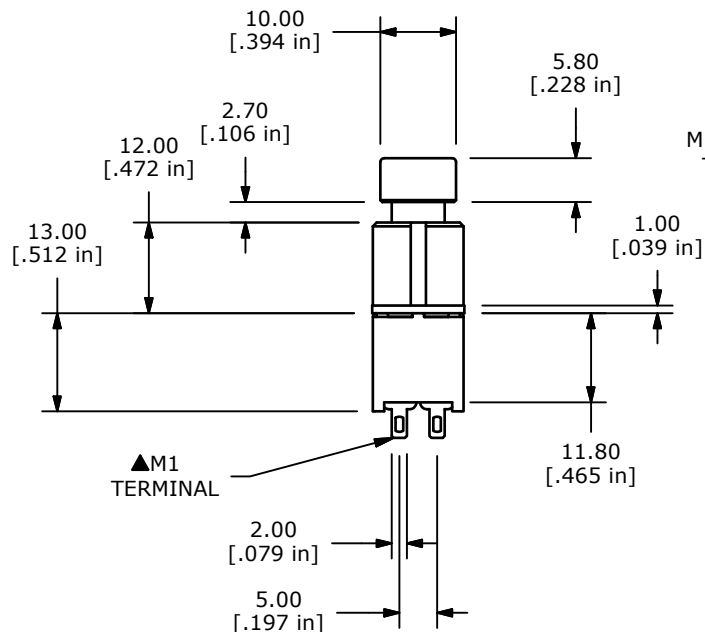


SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-2; 4-5	2-3; 5-6



▲M1
TERMINAL

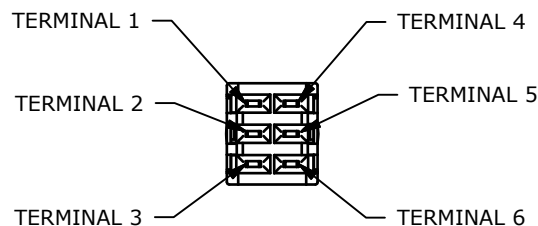

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 1A @ 9 VDC
6. ELECTRIC LIFE: 10,000 CYCLES
7. INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC.
8. ACUATION FORCE: 1600 ± 500gf
9. TRAVEL: 2.7mm
10. CONTACT RESISTANCE: 50 MILLI-OHM MAX. INITIAL
11. DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL.
12. OPERATING TEMP.: -10°C to 70°C
13. ▲ DENOTES CRITICAL PARAMETER.
14. 2011/65/EC (ROHS) COMPLIANT.
15. HARDWARE TO BE SHIPPED BULK:
T081101 - LOCK WASHER, QTY 1
T100025 - WASHER, QTY 1
T081102 - HEX NUT, QTY 2



E-SWITCH®

TITLE FS5700DPLT2B2M1QE

A	22675	New Release	1/16/17	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 1:1	DATE 1/16/2017	DR rc	DWG ST790008	REV A
--------------	-------------------	----------	-----------------	----------