


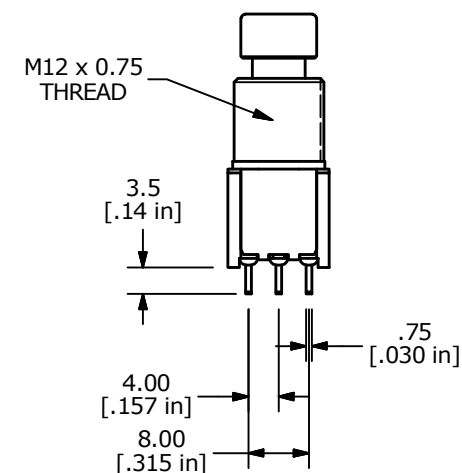


SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-2	2-3



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 1A @ 9 VDC
- ELECTRIC LIFE: 10,000 CYCLES
- INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC
- ACTUATION FORCE: 1000 ± 700 gf
- TRAVEL: 2.7mm
- CONTACT RESISTANCE: 50 MILLI-OHM MAX. INITIAL
- DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL
- OPERATING TEMP.: -10°C to 70°C
- ▲ DENOTES CRITICAL PARAMETER.
- HARDWARE TO BE SHIPPED BULK:
T081101 - LOCK WASHER, QTY 1
T100025 - WASHER, QTY 1
T081102 - HEX NUT, QTY 2

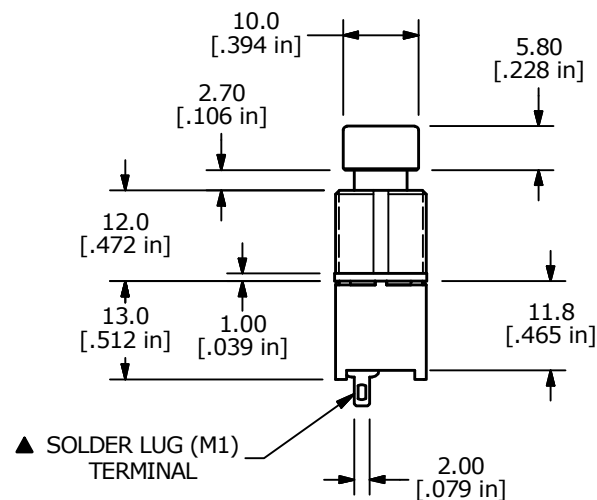

B	23558	drawing update, Tolerance to 1 place	9/12/18	MW
A	22675	New Release	1/16/17	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE FS5700SPLT2B2M1QE H

SCALE 1:1

DATE 1/16/2017

DR rc

DWG ST790004

REV B