
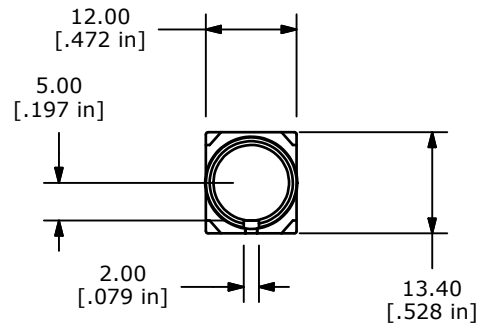
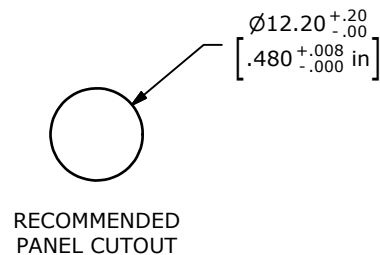


▲ SWITCH FUNCTION


| POS. 1 | POS. 2 |
|--------|--------|
|        |        |
| ON     | (ON)   |
| 1-2    | 2-3    |



( ) DENOTES MOMENTARY FUNCTION

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- RATING: 1A @ 9 VDC
- ELECTRIC LIFE: 20,000 CYCLES
- INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC.
- ACUATION FORCE: 1700 ± 700gf
- TRAVEL: 2.7mm
- CONTACT RESISTANCE: 50 MILLI-OHM MAX. INITIAL
- DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL.
- OPERATING TEMP.: -10°C to 70°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2011/65/EC (ROHS) COMPLIANT.

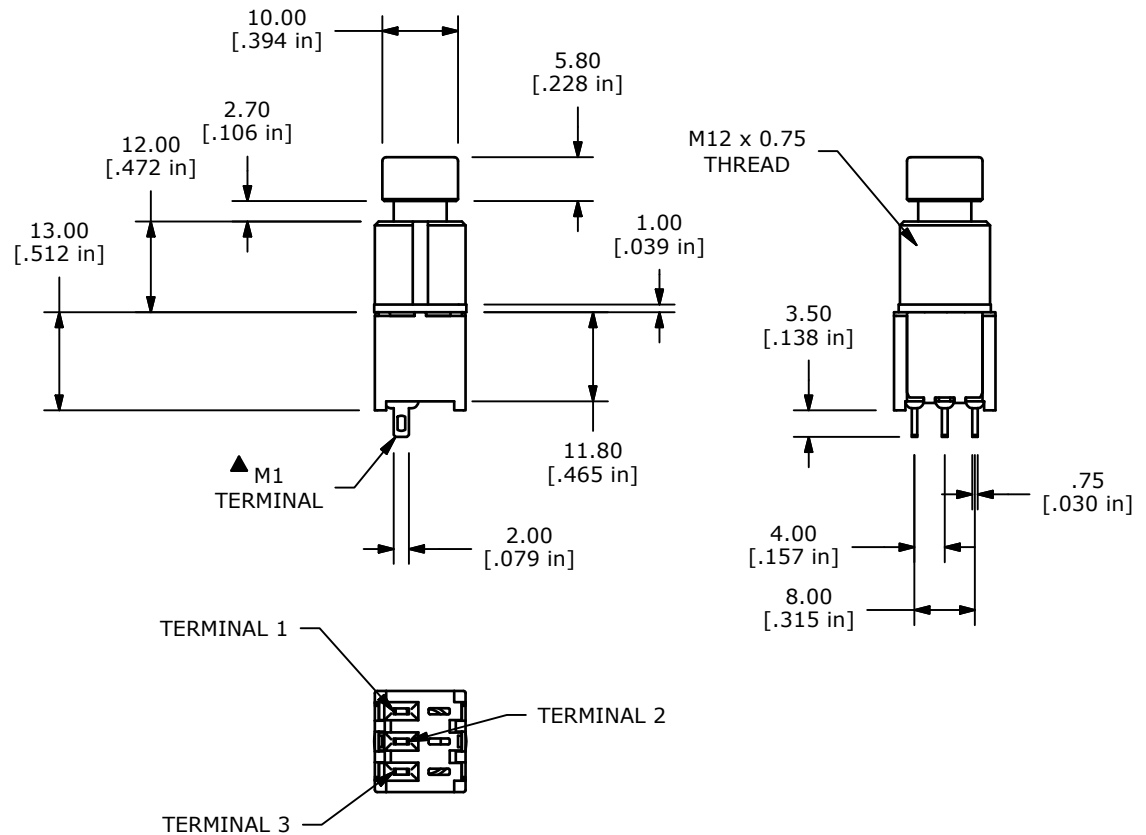

E-SWITCH®

TITLE FS5700SPMT2B2M1QE

|     |        |             |        |    |
|-----|--------|-------------|--------|----|
| A   | 22609  | New Release | 1/5/17 | rc |
| REV | PCR NO | DESCRIPTION | DATE   | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|              |                    |          |                |          |
|--------------|--------------------|----------|----------------|----------|
| SCALE<br>1:1 | DATE<br>11/18/2016 | DR<br>rc | DWG<br>T790006 | REV<br>A |
|--------------|--------------------|----------|----------------|----------|