
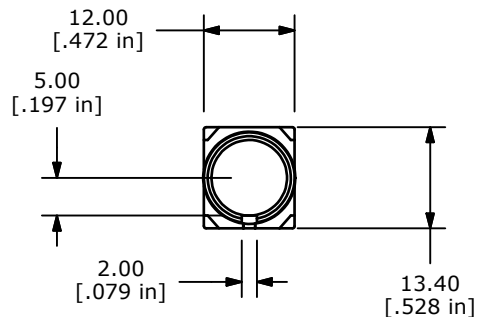
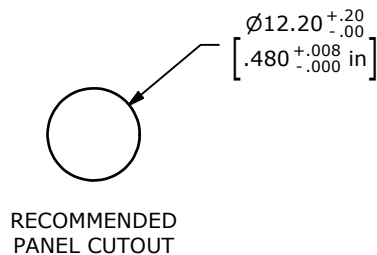


▲




| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| ON              | (ON)   |
| 1-2             | 2-3    |



( ) DENOTES MOMENTARY FUNCTION

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 1A @ 9 VDC
6. ELECTRIC LIFE: 20,000 CYCLES
7. INSULATION RESISTANCE: 100 MEGA-OHM MIN @ 500VDC.
8. ACUATION FORCE: 1700 ± 700gf
9. TRAVEL: 2.7mm
10. CONTACT RESISTANCE: 50 MILLI-OHM MAX. INITIAL
11. DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL.
12. OPERATING TEMP.: -10°C to 70°C
13. ▲DENOTES CRITICAL PARAMETER.
14. 2011/65/EC (ROHS) COMPLIANT.
15. HARDWARE TO BE SHIPPED BULK:  
T081101 - LOCK WASHER, QTY 1  
T100025 - WASHER, QTY 1  
T081102 - HEX NUT, QTY 2

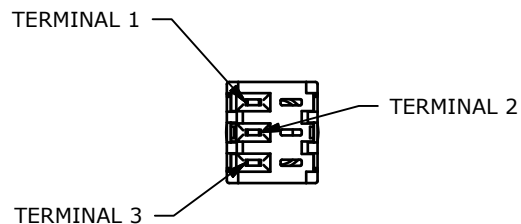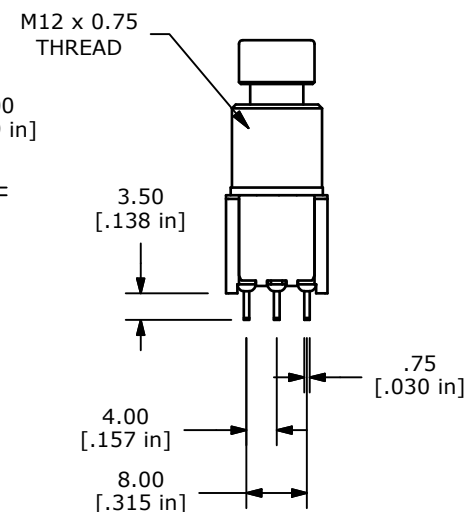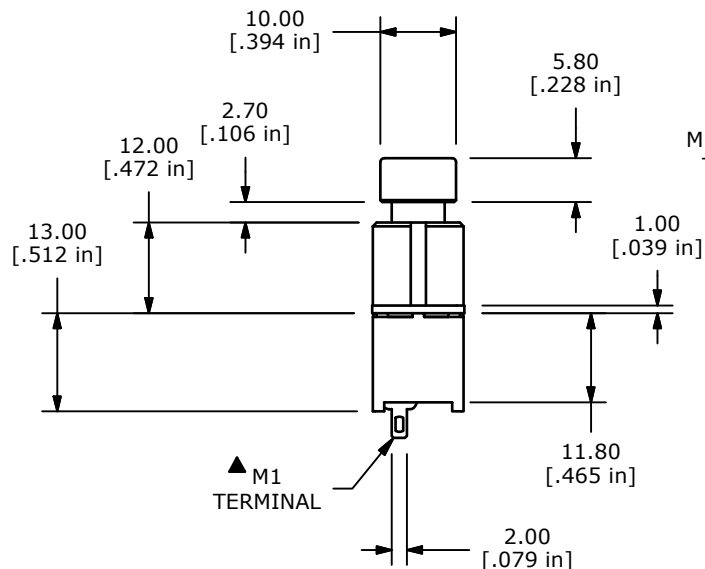

TITLE FS5700SPMT2B2M1QEH

|     |        |             |         |    |
|-----|--------|-------------|---------|----|
| A   | 22675  | New Release | 1/16/17 | rc |
| REV | PCR NO | DESCRIPTION | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|              |                   |          |                 |          |
|--------------|-------------------|----------|-----------------|----------|
| SCALE<br>1:1 | DATE<br>1/16/2017 | DR<br>rc | DWG<br>ST790006 | REV<br>A |
|--------------|-------------------|----------|-----------------|----------|