

SPECIFICATIONS

FUNCTION:

1P1T OFF-(ON) + 1P1T ON-(OFF)

RATINGS:

ANSI/UL 61058-1 and CAN/CSA C22.2 No. 61058-1 (E194579):
18(18)A 250V~ RM T55 [cURus]EN 61058-1:2002 (5022176):
18(18)A 250V~ 5E4 T55 [TÜV]

OPERATING FORCE:

6.1lbf±1.1lbf [3.0kgf±0.5kgf]

ELECTRICAL LIFE:

6,000 Cycles [cURus: 30°C Rise]
50,000 Cycles [TÜV, cURus: 55°C Rise]

TEMPERATURE:

Operating: 0°C to 55°C [cURus, TÜV]






APPROVALS:



COLORS

BODY:
WhiteACTUATOR:
BlackLOCK:
None

SCHEMATIC

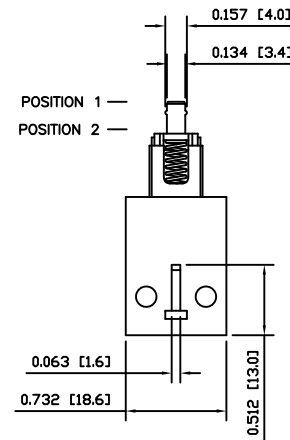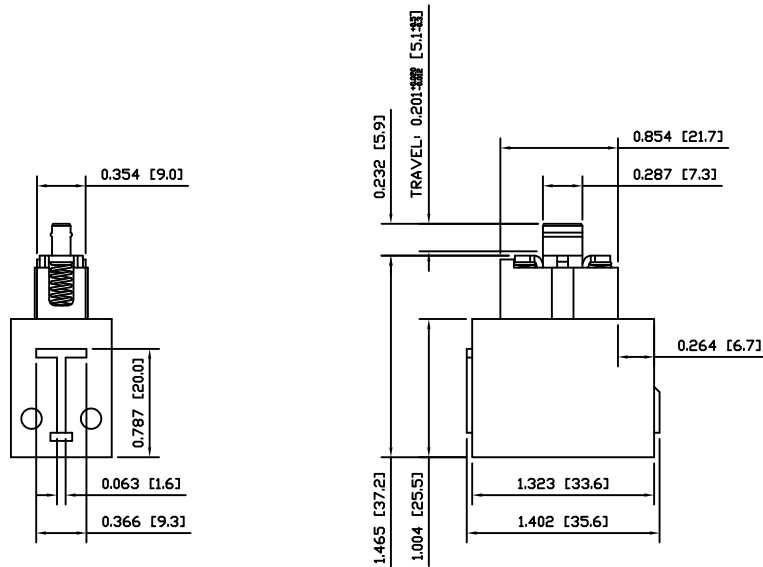

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E		UPDATED RATINGS		22495	16/09/13	MJR
D		CHANGED SCREWS TO PHILLIPS/FLAT		19210	10/07/22	CAB
C		ADDED TÜV APPROVAL, CORRECTED GENERAL TOLERANCE		18863	10/02/12	CAB
B		CORRECTED SCHEMATIC NUMBERS		PCRD0239	09/12/08	CAB
A		INITIAL RELEASE		PCRD0166	09/10/14	CAB
REV.		DESCRIPTION		PCR	DATE	DRAWN BY

DIMENSIONS	
INCHES [MILLIMETERS]	
GENERAL TOLERANCES	
0.000~0.236: ±0.004 [0~6: ±0.1]	
0.236~1.181: ±0.012 [6~30: ±0.3]	
1.181~4.724: ±0.020 [30~120: ±0.5]	
SCALE	
DRAWING NOT TO SCALE	

TITLE		HY106-6Y7-000-0000	
ITEM NUMBER		34-HY1066Y70000000	
DATE		JULY 22, 2010	
REVISION		E	