



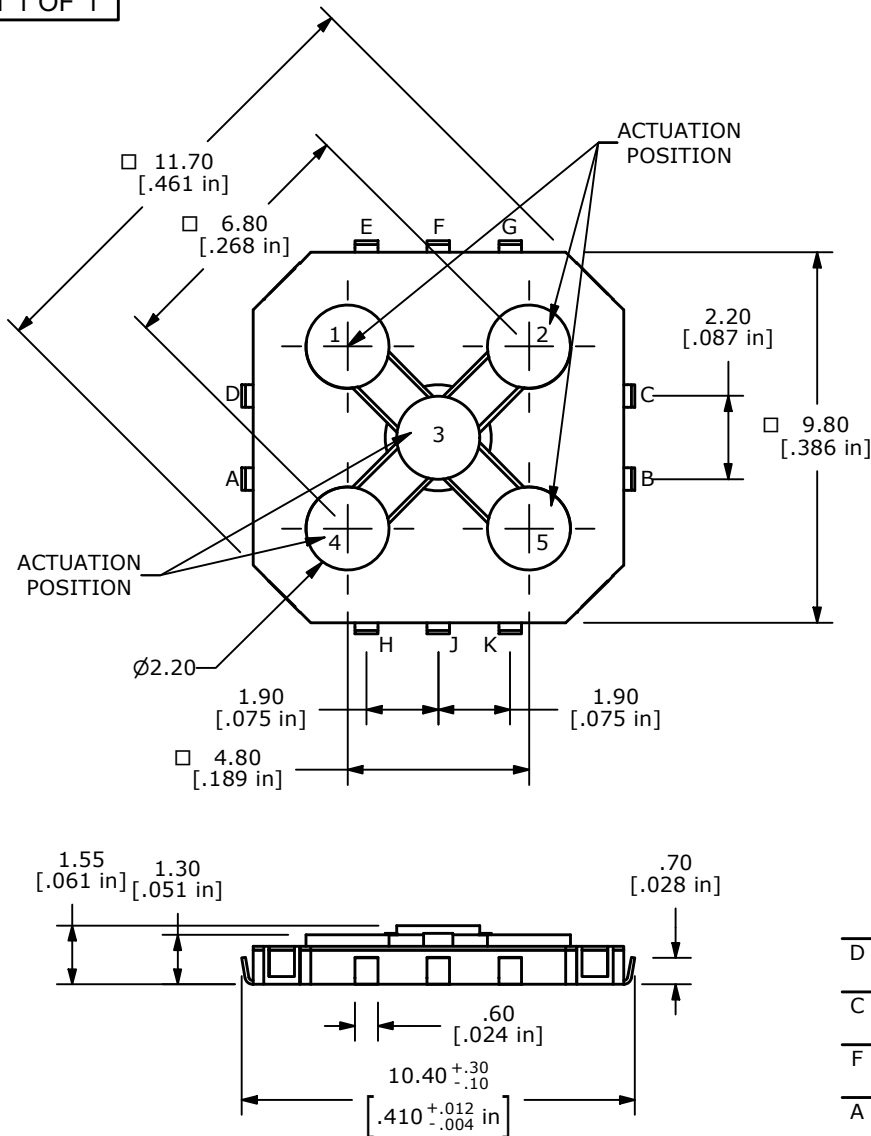


NOTES:

1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: X.XX=±0.2mm
3. RATING: DC 12V, 50mA
4. CONTACT ARRANGEMENT: 5 INDEPENDENT SPST, NORMALLY OPEN SWITCHES.
5. OPERATING TEMP: -40C TO +85C
6. STORAGE TEMP: -40C TO +85C
7. PACKAGE: TAPE AND REEL, 2500 PER REEL.
8. CONTACT MATERIAL: SILVER
9. CONTACT RESISTANCE: 100mΩ MAX(INITIAL).
10. INSULATION RESISTANCE: 100MΩ MIN.
- ▲ 11. ACTUATION FORCE: 320+80/-60 GRAMS CENTER, 180±60 GRAMS 4 TILT POSITIONS.
- ▲ 12. TRAVEL: 0.25±0.15mm
13. OPERATING LIFE: 200,000 CYCLES.
14. ▲ DENOTES CRITICAL PARAMETER.

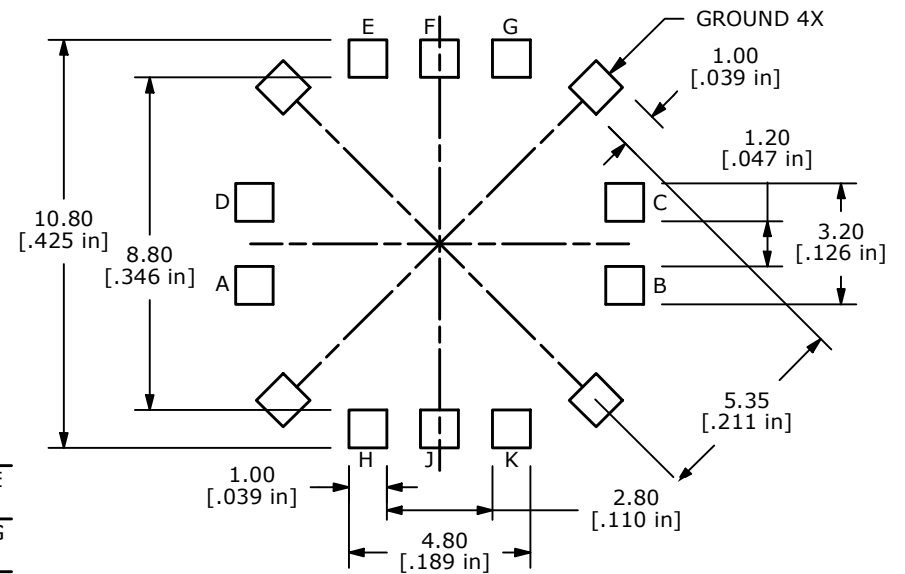

P.C.B. LAYOUT

CIRCUIT: 5PST
NORMALLY OPEN

CIRCUIT TABLE	
POSITION	CIRCUIT
1	D-E
2	C-G
3	F-J
4	A-H
5	B-K

REV	ECO NO	DESCRIPTION	DATE	BY
G	ECO-102953	NOTE 5: -40 WAS -20	08/27/24	JS



E-SWITCH®

OBJECT ID
000016920

TITLE JS1300AQ

SCALE
5:1DATE
12/20/2006DR
TNDWG
N211123REV
GTHE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED