
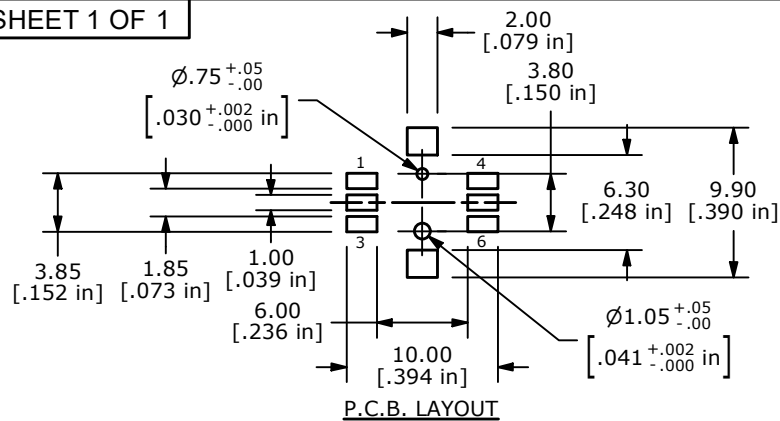

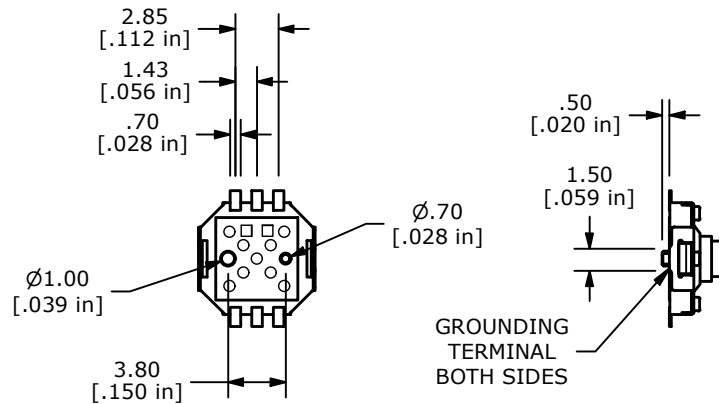


▲ CIRCUIT DIAGRAM

OPERATING POSITION	CIRCUIT
A	⑤-①
B	⑤-④
C	⑤-③
D	⑤-⑥
CENTER PUSH	⑤-②

NOTES:

1. RATING: 12V DC 50mA MAX.
2. CONTACT RESISTANCE: 100mΩ MAX.
3. OPERATING FORCES:
CENTER PUSH: 360 ± 60gf
STROKE: 0.25 +0.1/-0.2mm
4-WAY DIRECTION: 160 ± 50gf
TRAVEL: 5° +2.5°/-1°
4. LIFE CYCLES: 100,000
5. INSULATION RESISTANCE: 100MΩ @ 100VDC
6. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE
7. OPERATING TEMPERATURE: -40°C to +85°C
8. STORAGE TEMPERATURE: -40°C to +85°C
9. GENERAL TOLERANCE: ± 0.3mm
10. ▲ DENOTES CRITICAL PARAMETER.

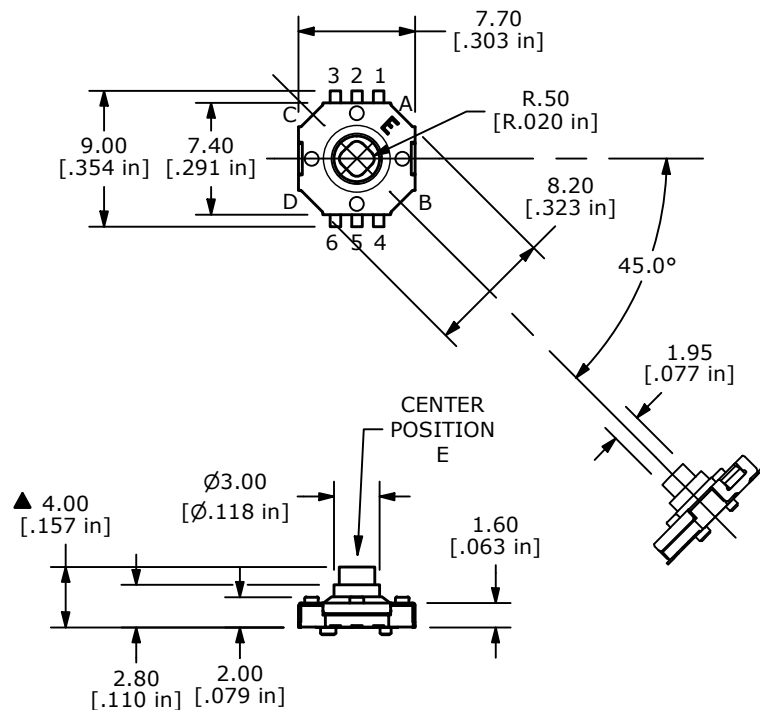

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102954	Update print	09/20/24	MW	TITLE JS1400CFQ				000016925
					SCALE 2:1	DATE 6/3/2013	DR EBP	DWG N211129	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED