


SCHEMATIC


SWITCH FUNCTION	
POSITION	CONNECTED TERM. #
A	1 - 4
B	1 - 2
C	1 - 6
D	1 - 5
PUSH E	1 - 3

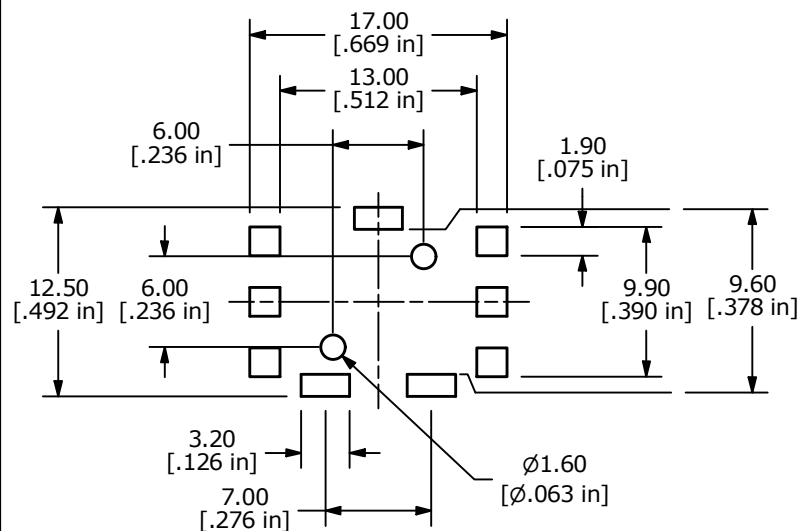

P.C. MOUNTING

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X = ± 0.4 X.XX = ± 0.25
4. TRAVEL: LEVER $8^\circ \pm 2^\circ$; PUSH: $1.0\text{mm} \pm 0.2$
5. RATING: 20mA @ 15 VDC
6. OPERATION FORCE: LEVER = $280 \pm 100\text{gf}$; PUSH = $500 \pm 150\text{gf}$
7. CONTACT RESISTANCE: 100 mΩ MAX.
8. LIFE CYCLES 100,000 CYCLES MIN.
7. ▲ DENOTES CRITICAL PARAMETER
- ▲ 8. MADE FROM HIGH TEMPERATURE MATERIALS SUITABLE FOR REFLOW SOLDERING
- ▲ 9. PACKAGING: TAPE and REEL (230 pcs. per REEL)

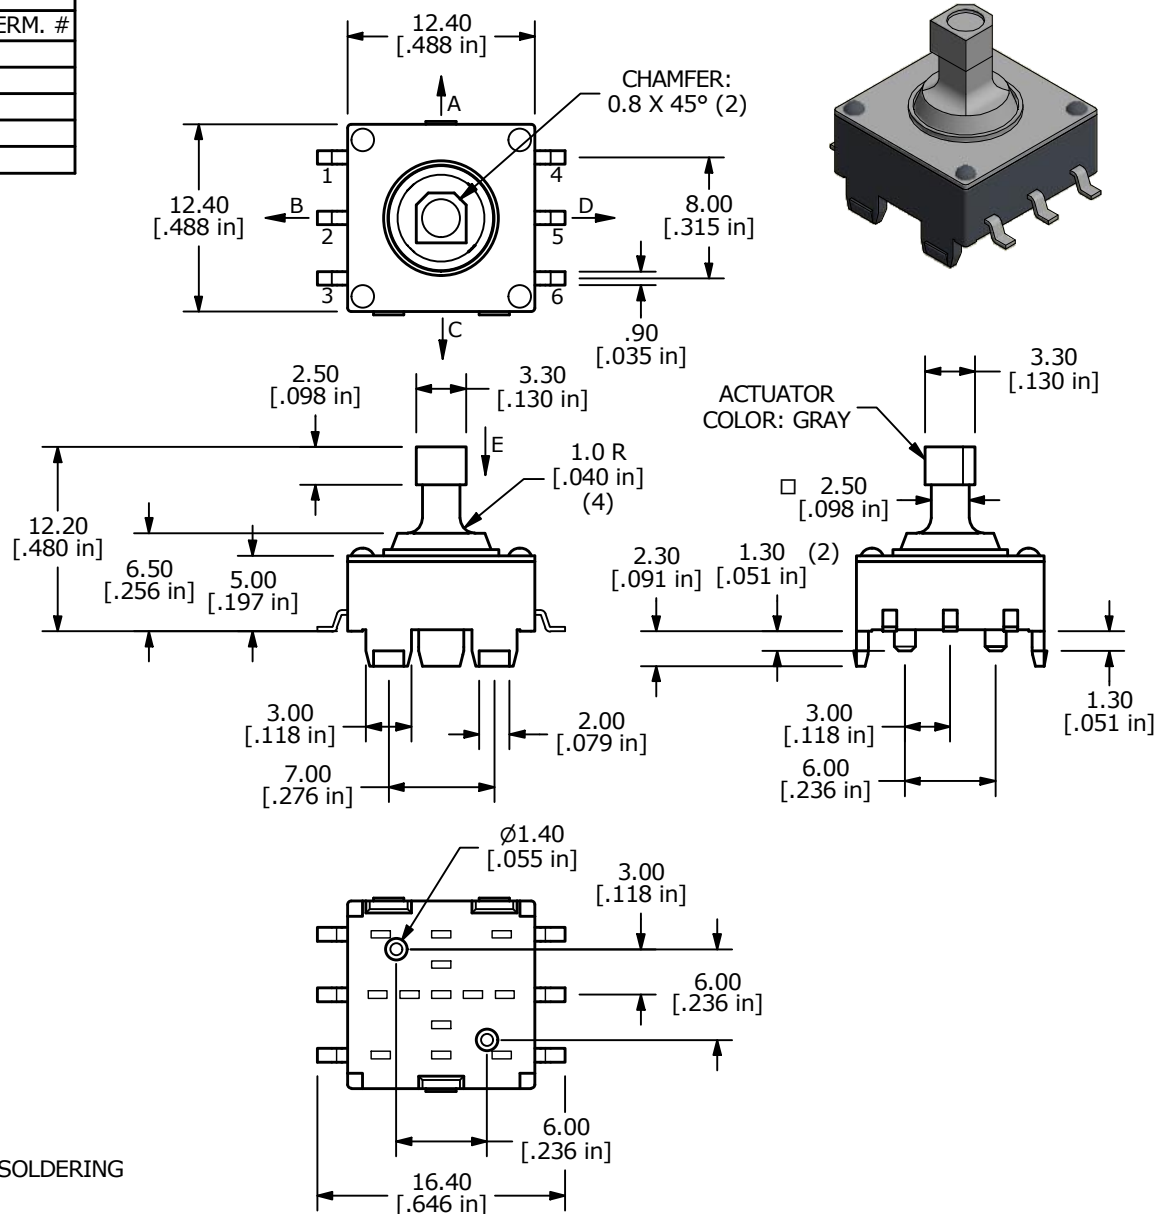

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101508	Release	12/16/22	MW	TITLE JS5208TR				100123265
					SCALE	DATE	DR	DWG	REV
					2:1	12/13/2022	MW	P200027	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED