



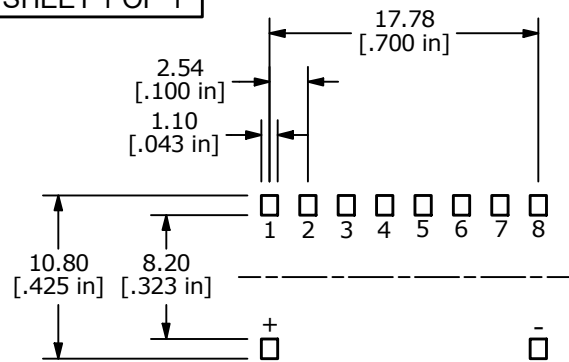





RECOMMENDED PCB LAYOUT



▲ CIRCUIT
8 POSITION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
5. CONTACT RATING: 25mA @ 24VDC
6. OPERATING LIFE: 2,000 CYCLES, EACH CIRCUIT
7. CONTACT RESISTANCE: 100m Ω Max.
8. INSULATION RESISTANCE: 100 M Ω min. @ 500VDC
9. DIELECTRIC STRENGTH: 500V AC for 1 Minute
10. OPERATING TEMP: -20°C to 85°C
11. OPERATING FORCE: 1,000gf MAX.
12. TRAVEL: 0.8mm
- ▲ 13. PART SUPPLIED WITH ALL POLES IN THE OFF POSITION
14. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 15. PACKAGING: TUBE (22 per TUBE (8 POSITION))

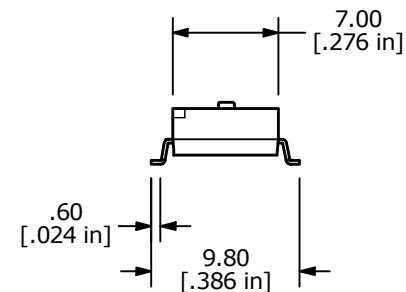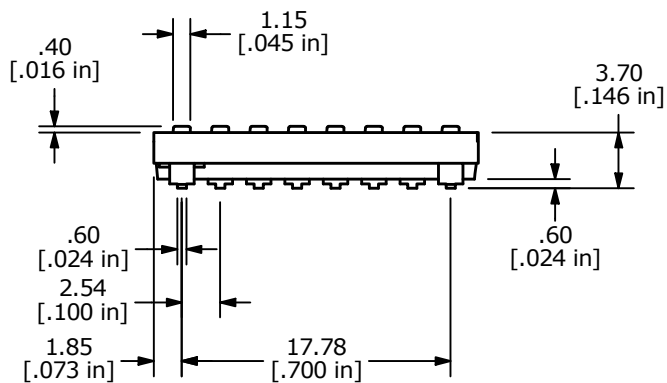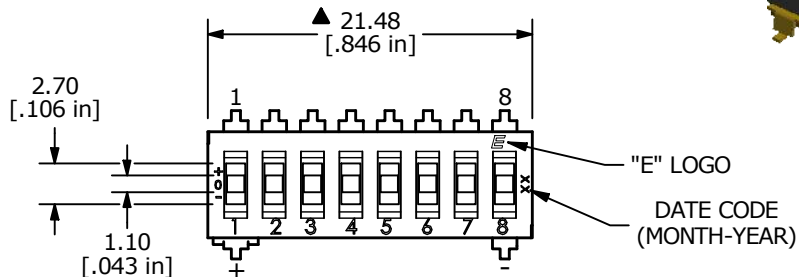

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-101643	Release	02/07/23	MW						100123030
					TITLE KAD08LGGT					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					2:1	2/6/2023	MW	N722108	A	