

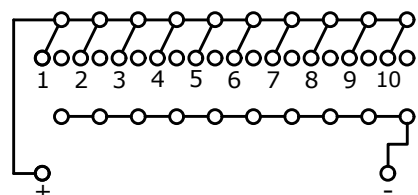
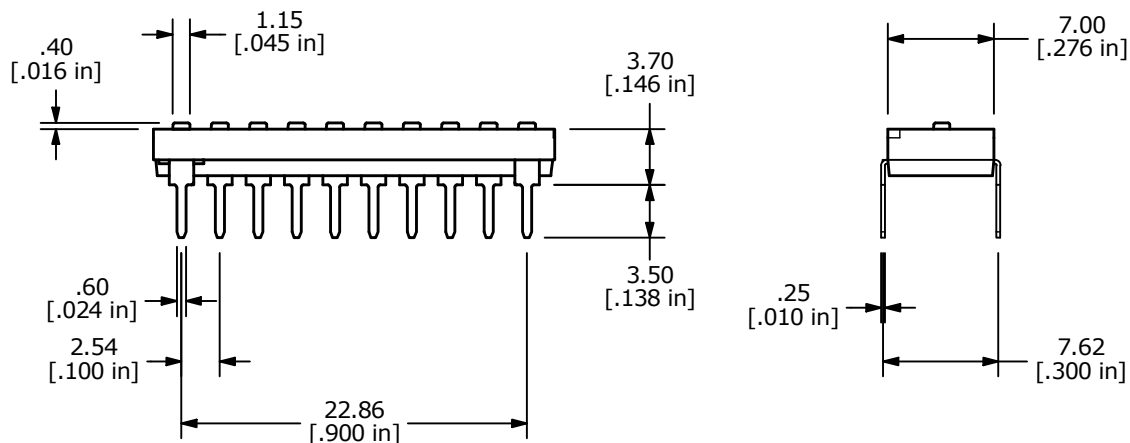


RECOMMENDED PCB LAYOUT

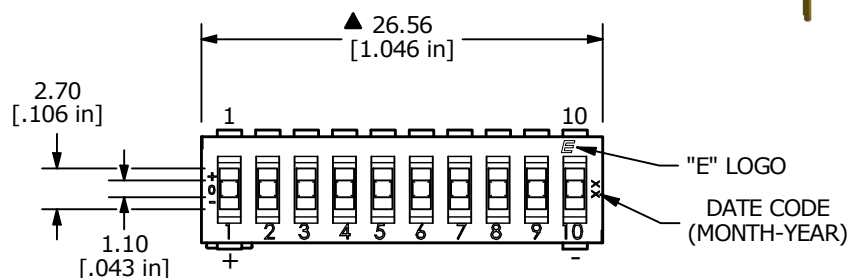


▲ CIRCUIT 10 POSITION

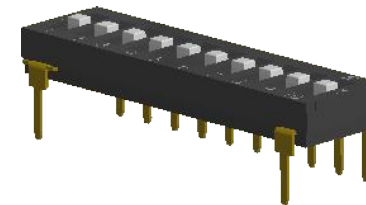

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: GOLD
5. CONTACT RATING: 25mA @ 24VDC
6. OPERATING LIFE: 2,000 CYCLES, EACH CIRCUIT
7. CONTACT RESISTANCE: 100mΩ Max.
8. INSULATION RESISTANCE: 100 MΩ min. @ 500VDC
9. DIELECTRIC STRENGTH: 500V AC for 1 Minute
10. OPERATING TEMP: -20°C to 85°C
11. OPERATING FORCE: 1,000gf MAX.
12. TRAVEL: 0.8mm
- ▲ 13. PART SUPPLIED WITH ALL POLES IN THE OFF POSITION
14. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 15. PACKAGING: TUBE (18 per TUBE (10 POSITION))

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®			OBJECT ID	
A	ECO-101545	Release	01/03/23	MW	TITLE KAD10LHGT			100122810	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	10/11/2022	MW	N722010	A