
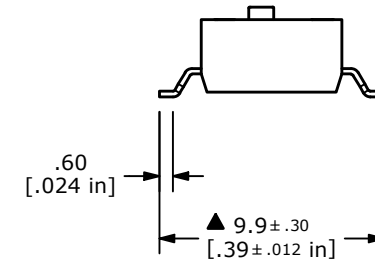
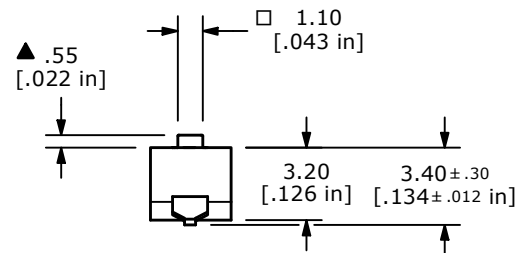


CIRCUIT  
▲ 1 POSITION

## NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)  
100mA @50VDC (CARRY)
- ▲ 5. CONTACT/TERMINALS: GOLD PLATED
6. INSULATION RESISTANCE: 100 M $\Omega$  MIN. @500VDC
7. CONTACT RESISTANCE: 50 m $\Omega$  MAX INITIAL
8. OPERATING TEMP: -40°C to +85°C
9. STORAGE TEMP: -40°C to +85°C
10. ELECTRICAL LIFE: 1000 CYCLES @ 25mA, 24VDC
11. MECHANICAL LIFE: 1000 CYCLES
12. TRAVEL: 0.9mm
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
15. OPERATING FORCE: 1000gf MAX.
- ▲ 16. PACKAGE: TAPE AND REEL: 800 pcs/REEL  
WITH ALL POLES IN THE "OFF" POSITION

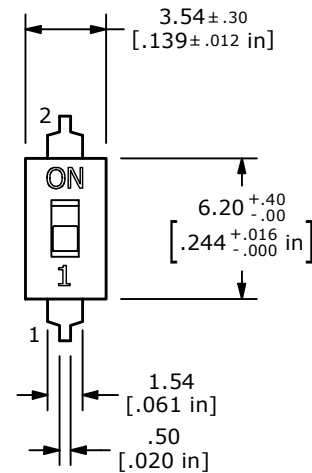

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102590	Release	03/21/24	MW	TITLE KAG01LGGR				100127078
					SCALE	DATE	DR	DWG	REV
					3:1	3/19/2024	MW	P800010	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED