
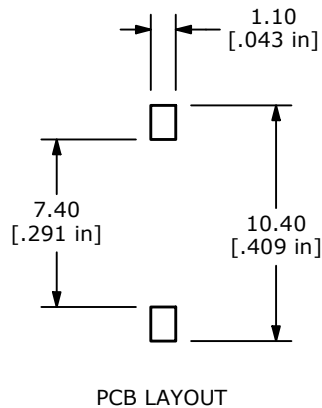
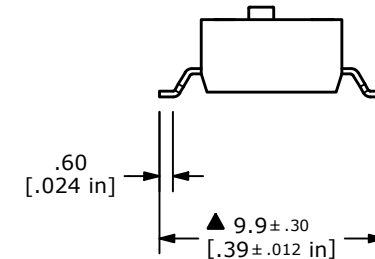
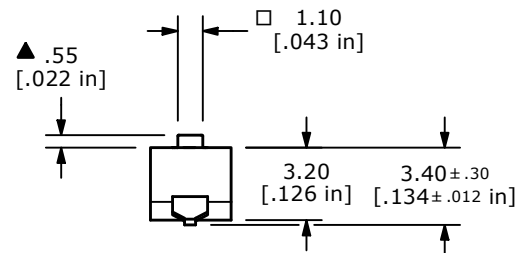


CIRCUIT

▲ 1 POSITION

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)
100mA @50VDC (CARRY)
- ▲ 5. CONTACT/TERMINALS: GOLD PLATED
6. INSULATION RESISTANCE: 100 M Ω MIN. @500VDC
7. CONTACT RESISTANCE: 50 m Ω MAX INITIAL
8. OPERATING TEMP: -40°C to +85°C
9. STORAGE TEMP: -40°C to +85°C
10. ELECTRICAL LIFE: 1000 CYCLES @ 25mA, 24VDC
11. MECHANICAL LIFE: 1000 CYCLES
12. TRAVEL: 0.9mm
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
15. OPERATING FORCE: 1000gf MAX.
- ▲ 16. PACKAGE: CLEAR TUBES TO ACCOMMODATE AUTO INSERTION
120pcs PER TUBE WITH ALL POLES IN THE "OFF" POSITION

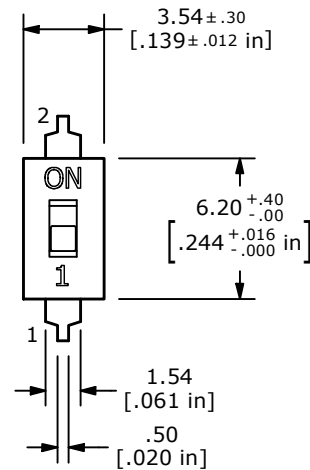

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102589	Release	03/21/24	MW	TITLE KAG01LGGT				100126997
					SCALE 3:1	DATE 3/19/2024	DR MW	DWG P800008	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED