
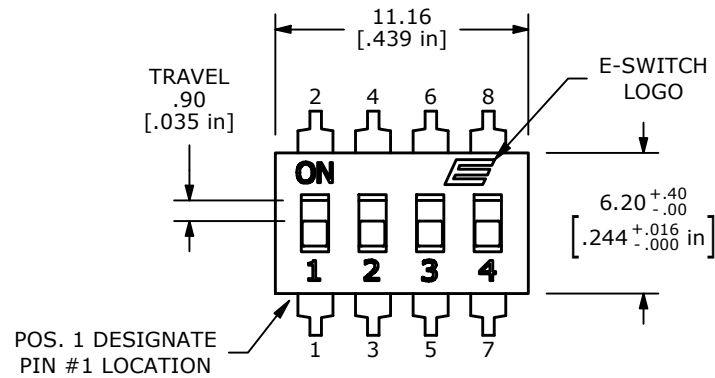

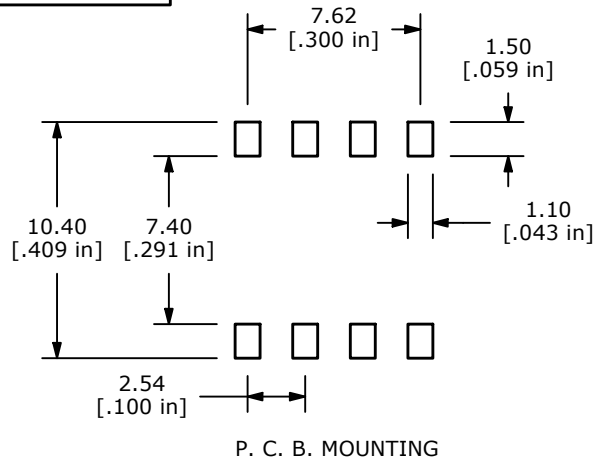
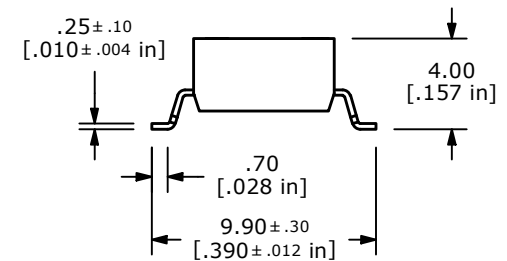


NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)
100mA @50VDC (CARRY)
- ▲ 5. CONTACT/TERMINALS: GOLD FLASH PLATED
6. INSULATION RESISTANCE: 100 MΩ MIN. @500VDC.
7. CONTACT RESISTANCE: 50 mΩ MAX INITIAL.
8. OPERATING TEMP: -40°C TO +105°C
9. STORAGE TEMP: -40°C TO +105°C
10. ELECTRICAL LIFE: 1,000 CYCLES
11. MECHANICAL LIFE: 1,000 CYCLES
- ▲ 12. PACKAGE: TUBE, WITH ALL POLES IN THE "OFF" POSITION
13. ▲ DENOTES CRITICAL PARAMETER
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 15. OPERATING FORCE: 1000gf MAX.

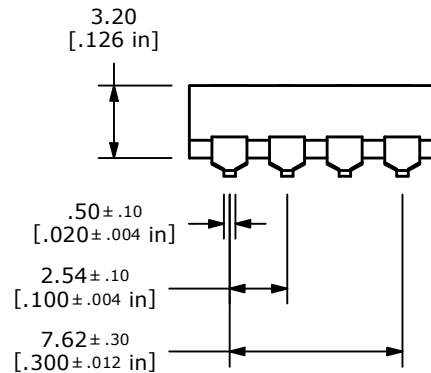

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-104075	RELEASE	05/12/26	JS	TITLE KAG04TGGT				100132573
					SCALE 3:1	DATE 4/21/2026	DR JS	DWG P800021	REV A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									