

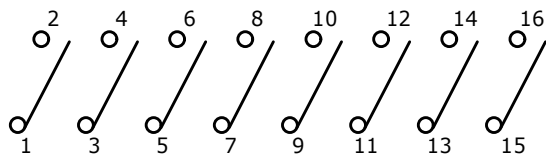


P.C.B. MOUNTING

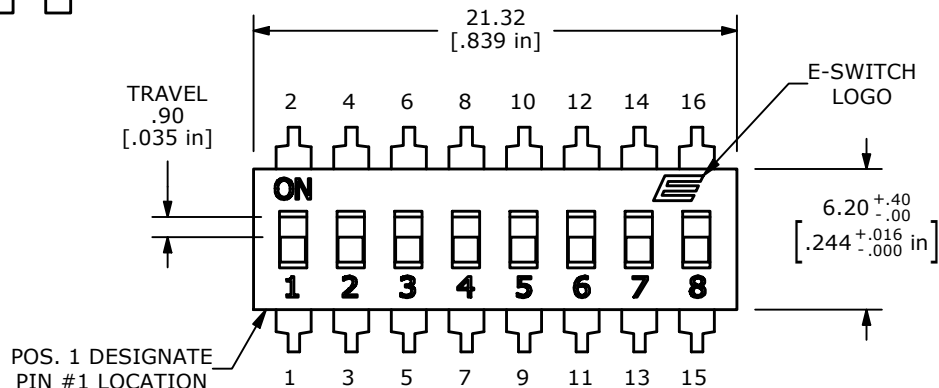


▲ CIRCUIT - 8 POSITION

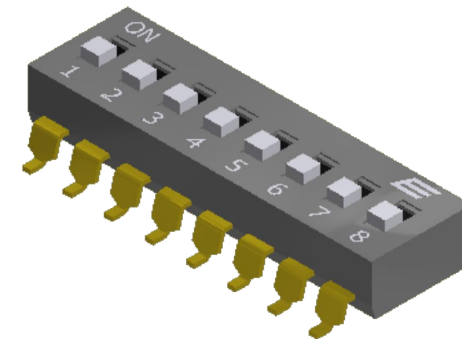

POS. 1 DESIGNATE
PIN #1 LOCATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (SWITCH)
100mA @50VDC. (CARRY)
- ▲ 5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) COPPER
TERMINALS: BRONZE w/GOLD PLATE.
6. INSULATION RESISTANCE; 100 MΩ MIN. @500VDC.
7. CONTACT RESISTANCE; 50 mΩ MAX INITIAL.
8. OPERATING TEMP: -40°C TO +105°C.
9. STORAGE TEMP: -40°C TO +105°C.
- ▲ 10. ELECTRICAL LIFE: 1,000 CYCLES.
11. MECHANICAL LIFE: 1,000 CYCLES
12. PACKAGE: TAPE AND REEL (800 pcs/REEL)
WITH ALL POLES IN THE "OFF" POSITION.
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE.
- ▲ 15. OPERATING FORCE: 1000 GRAMS MAX.

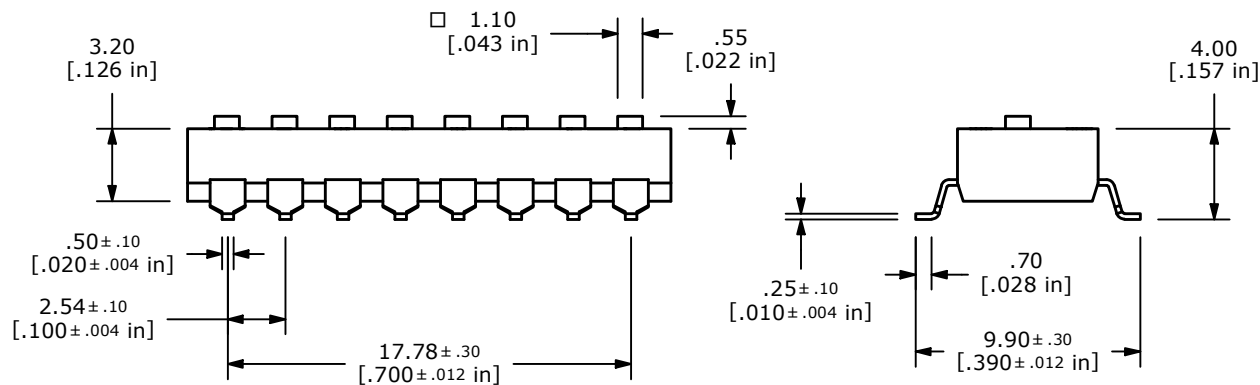

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-102069	NOTES 8 AND 9 -40C TO 105C WAS 85	06/28/23	JS
A	ECO-102039	RELEASED	06/20/23	JS



OBJECT ID
100124941

TITLE
KAG08LGGR

SCALE 3:1	DATE 6/19/2023	DR JS	DWG P800002	REV B
--------------	-------------------	----------	----------------	----------