

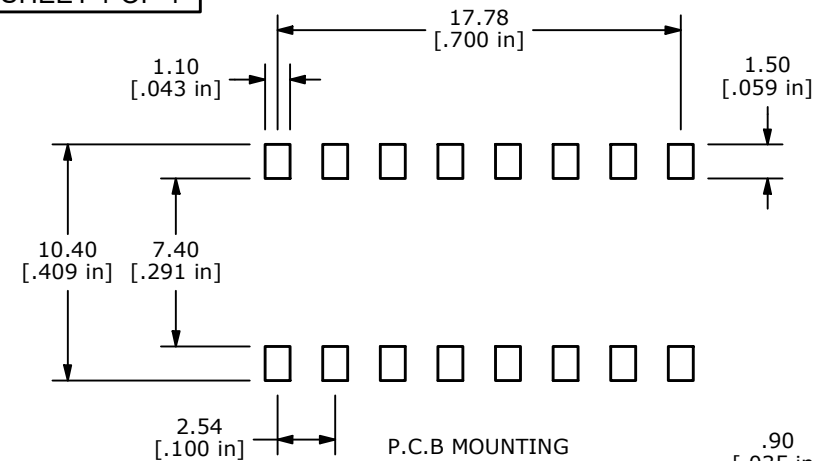
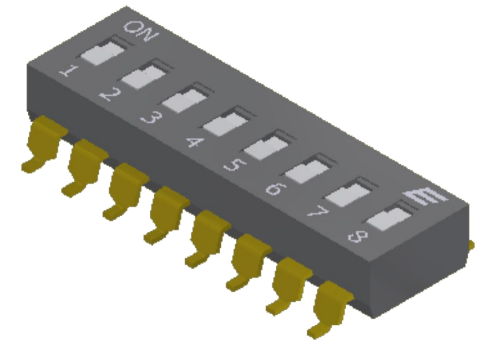


▲ CIRCUIT - 8 POSITION

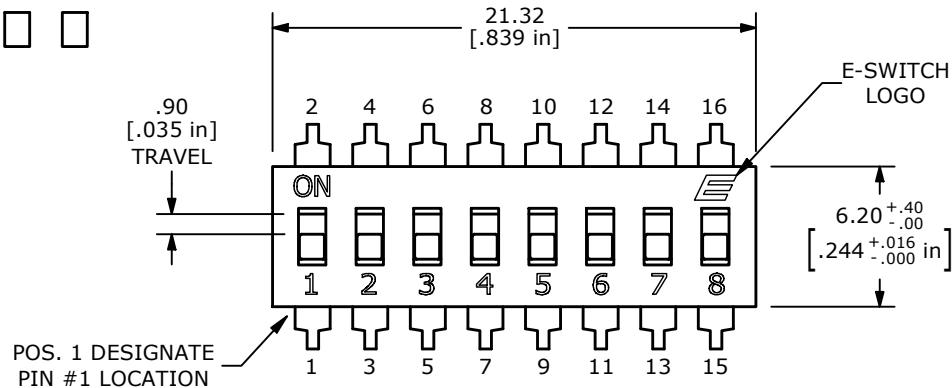

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)
100mA @50VDC (CARRY)
- ▲ 5. CONTACT/TERMINALS: GOLD PLATED
6. INSULATION RESISTANCE: 100 M Ω MIN. @ 500VDC
7. CONTACT RESISTANCE: 50 m Ω MAX INITIAL
8. OPERATING TEMP: -40°C to +105°C
9. STORAGE TEMP: -40°C to +105°C
10. ELECTRICAL LIFE: 1,000 CYCLES
11. MECHANICAL LIFE: 1,000 CYCLES
- ▲ 12. PACKAGE: TUBE, WITH ALL POLES IN THE "OFF" POSITION
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 15. OPERATING FORCE: 1000gf MAX.

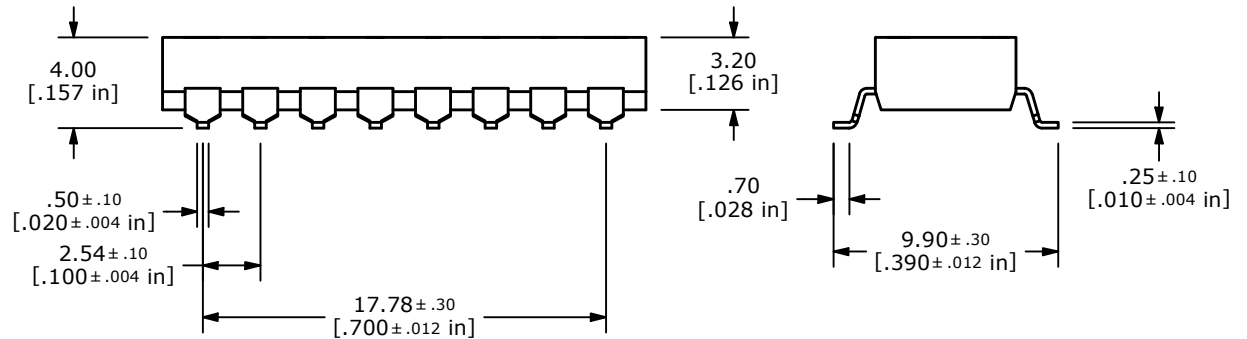

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102722	Release	05/06/24	MW	TITLE KAG08SGGT				100127368
					SCALE	DATE	DR	DWG	REV
					3:1	5/3/2024	MW	P800011	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED