



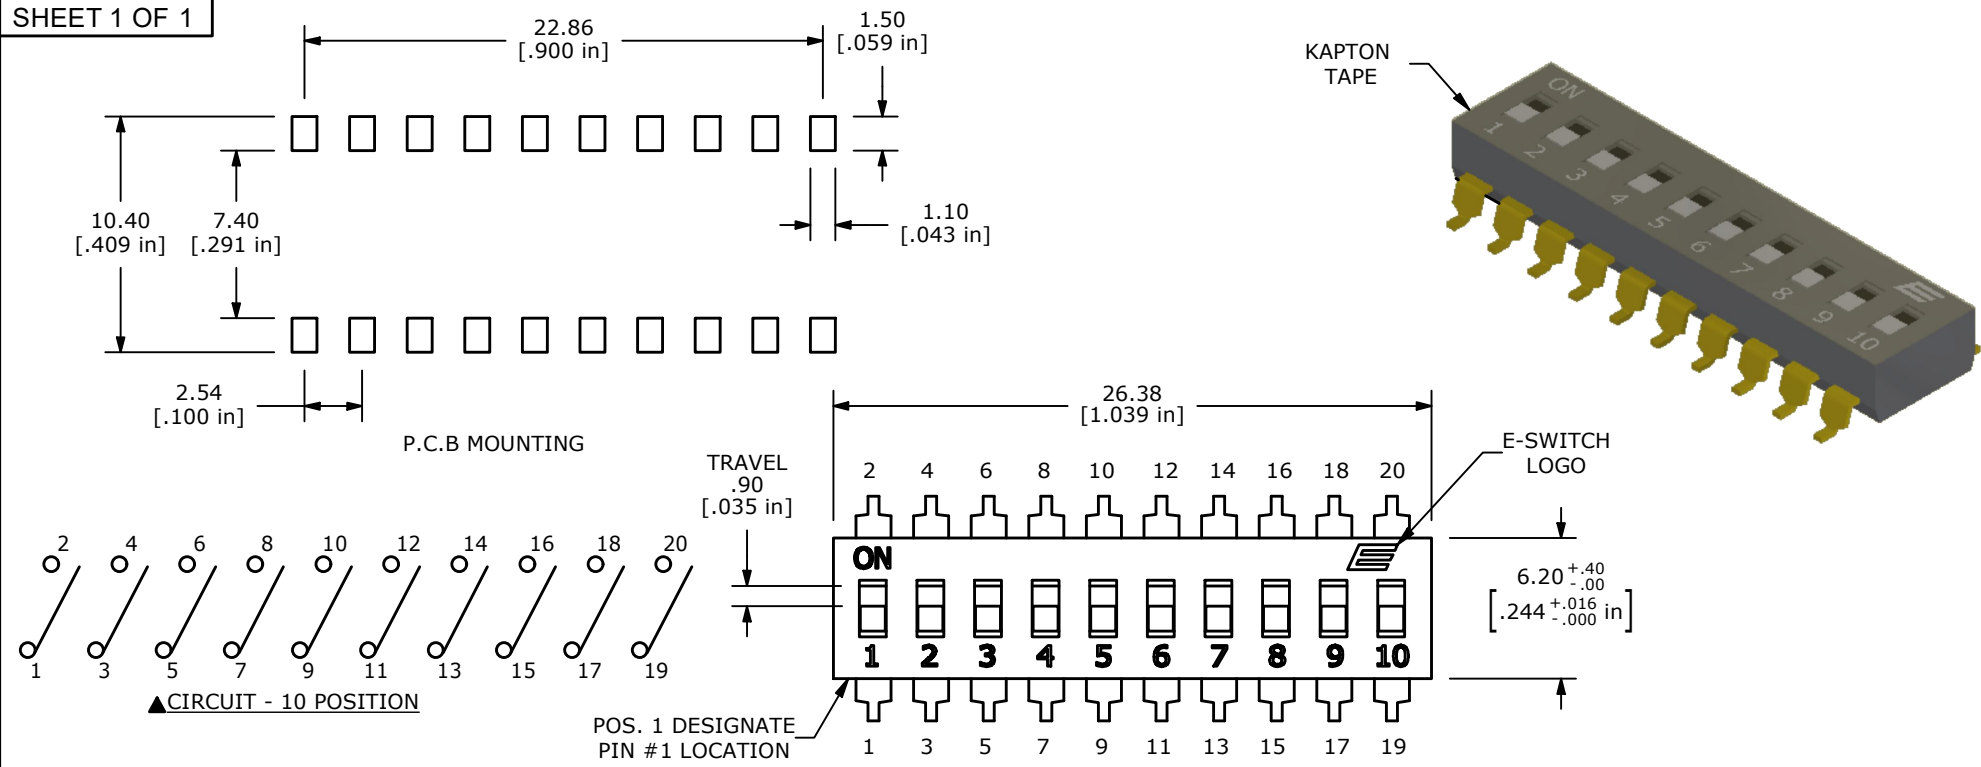

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.(SWITCH)
100mA @50VDC.(CARRY)
- ▲ 5. TERMINALS: GOLD PLATED.
6. INSULATION RESISTANCE; 100 MΩ MIN. @500VDC.
7. CONTACT RESISTANCE; 50 mΩ MAX INITIAL.
8. OPERATING TEMP: -40°C TO +105°C.
9. STORAGE TEMP: -40°C TO +105°C.
10. ELECTRICAL LIFE: 1,000 CYCLES.
11. MECHANICAL LIFE: 1,000 CYCLES
12. PACKAGE: TAPE AND REEL (800 pcs/REEL)
WITH ALL POLES IN THE "OFF" POSITION.
13. ▲ DENOTES CRITICAL PARAMETER.
14. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE.
15. OPERATING FORCE: 1000 gf MAX.

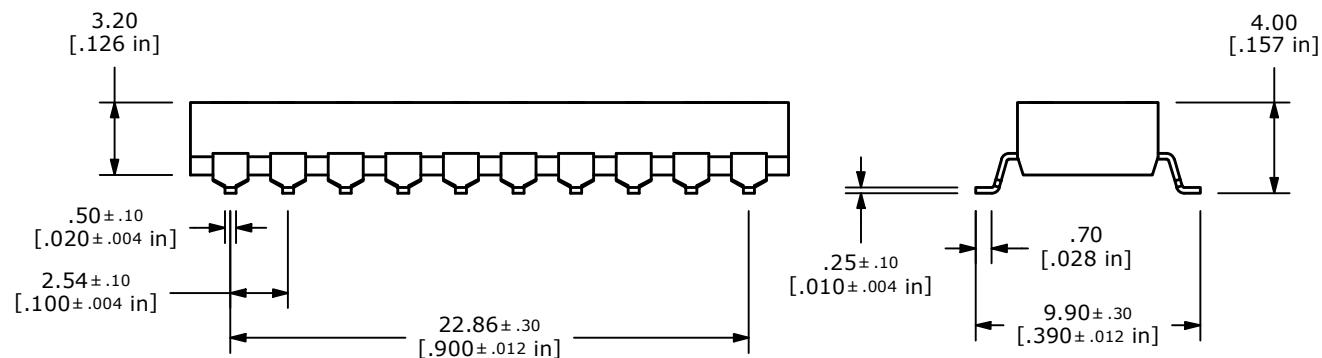

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-102518	RELEASE	02/02/24	JS						100126727
					TITLE KAG10TGGR					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:1	DATE 1/31/2024	DR JS	DWG P800007	REV A	