
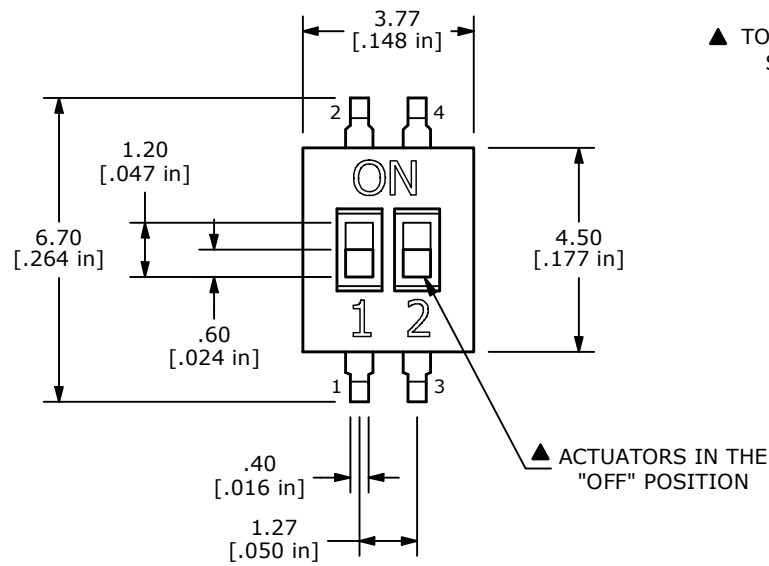

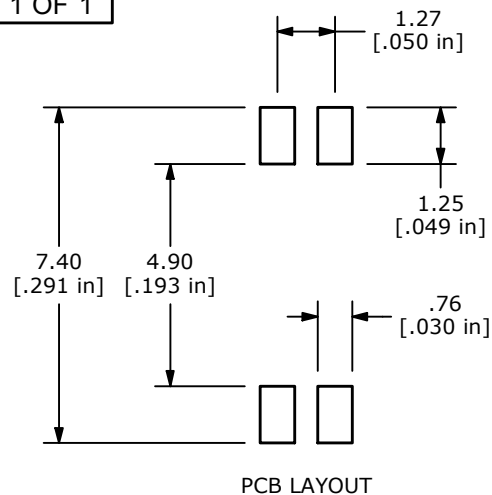


## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE:  $500 \pm 100\text{gf}$
5. TRAVEL:  $0.6 \pm 0.25\text{mm}$
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE:  $100\text{m}\Omega$  MAX.
8. INSULATION RESISTANCE:  $100\text{M}\Omega$  MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. OPERATING LIFE: 1,000 CYCLES
11. OPERATING TEMPERATURE:  $-40^\circ\text{C}$  to  $85^\circ\text{C}$
- ▲ 12. PACKAGING: TUBE
13. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 14. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE 'OFF' POSITION

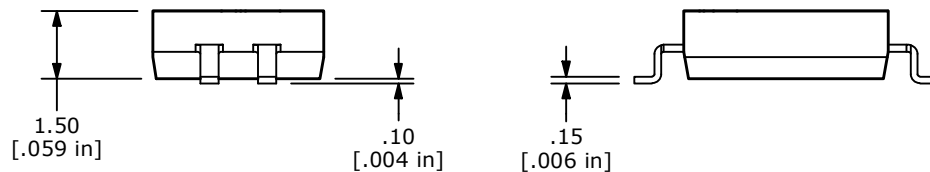

| REV | ECO NO     | DESCRIPTION  | DATE     | BY | E-SWITCH®                      |           |     |         | OBJECT ID |
|-----|------------|--------------|----------|----|--------------------------------|-----------|-----|---------|-----------|
| B   | ECO-102376 | print update | 11/16/23 | MW | TITLE KAN1102RT (OFF POSITION) |           |     |         | 000016887 |
|     |            |              |          |    | SCALE                          | DATE      | DR  | DWG     | REV       |
|     |            |              |          |    | 6:1                            | 8/29/2001 | CJB | N111199 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED