


RECOMMENDED P.C.B. LAYOUT



- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. CONTACT RATINGS: 25mA @24VDC.
 5. CONTACT MATERIAL: Copper Alloy w/ gold plate over Nickel Plate.
 6. PACKAGED: IN DISPENSING TUBE.
 7. TRAVEL: 1.00mm (Actuator)
 8. Δ DESIGNATE MAJOR:

| | | | | | | | | | |
|---|--|---------------|--|-------------------------|--|--------|--|---------|--|
| REV. A | | ECN NO. 11902 | | RELEASED FOR PRODUCTION | | 2/4/02 | | CB | |
| REV. A | | ECN NO. 11902 | | DESCRIPTION | | DATE | | CHKD | |
| <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p> | | | | | | | | | |
| TITLE | | | | KANI106 R (1/2 PITCH) | | | | | |
| SCALE | | 3:1 | | DATE | | 2/4/02 | | DR | |
| SCALE | | 3:1 | | DATE | | 2/4/02 | | CJB | |
| SCALE | | 3:1 | | DATE | | 2/4/02 | | N111196 | |
| SCALE | | 3:1 | | DATE | | 2/4/02 | | REV | |
| SCALE | | 3:1 | | DATE | | 2/4/02 | | A | |

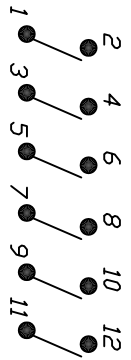