
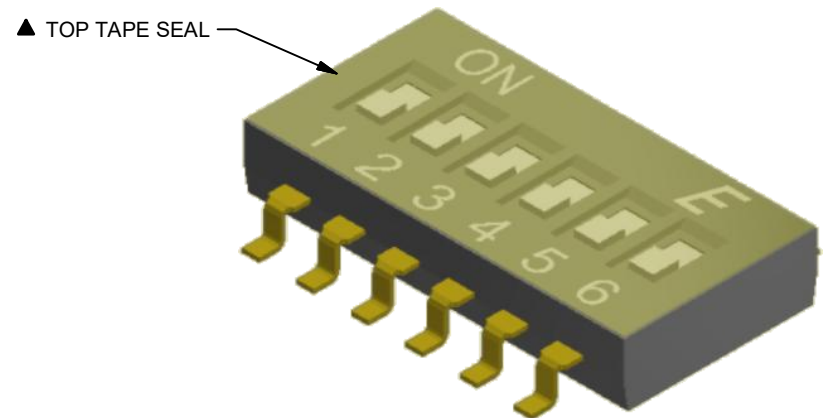
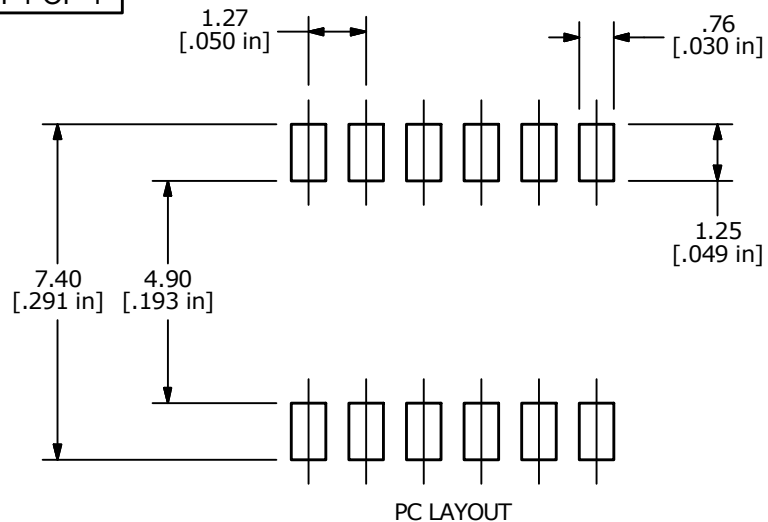


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: $500 \pm 100\text{gf}$
5. TRAVEL: $0.6 \pm 0.25\text{mm}$
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX.
8. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: 4000 PIECES PER TAPE AND REEL
13. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 14. SWITCHES TO BE SHIPPED WITH THE ACTUATORS IN THE "OFF" POSITION.

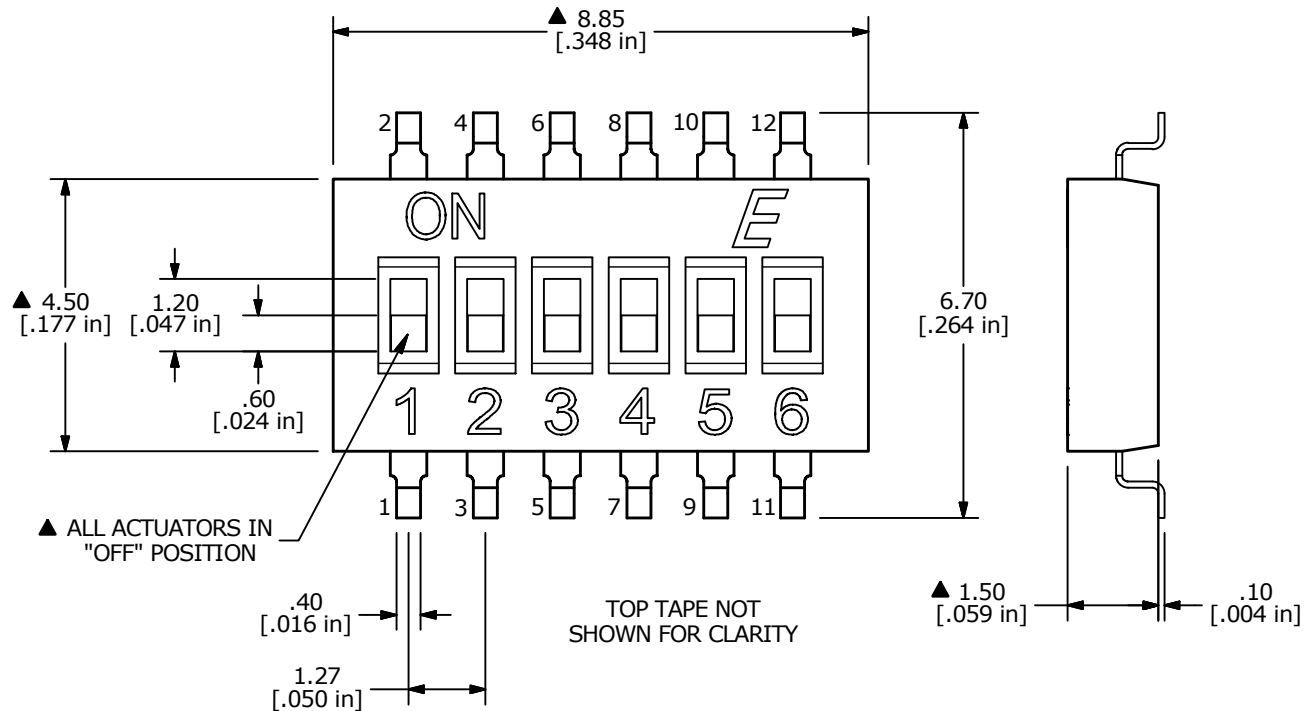

E-SWITCH®

B	24106	drawing update, added 2nd description	11/19/19	MW
A	16986	RELEASED FOR PRODUCTION	2/13/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE KAN1106RR (OFF Position, Top Tape, T & R)

SCALE 8:1

DATE 2/13/2007

DR TN

DWG N111207

REV B