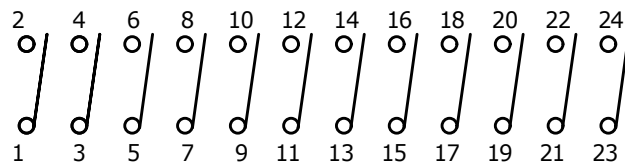
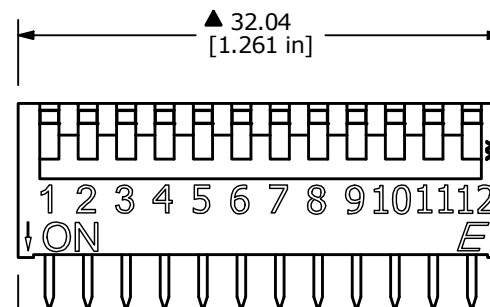
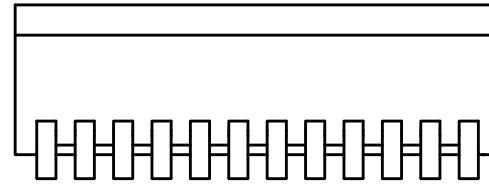
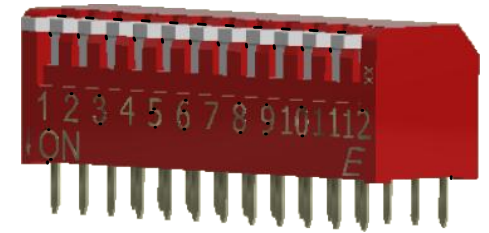
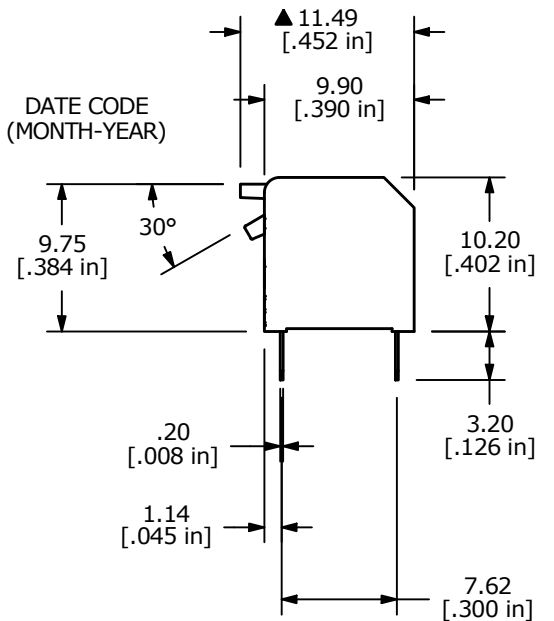
RECOMMENDED
PCB LAYOUT

▲ CIRCUIT - 12 POSITION

1.30
[.051 in]2.05
[.081 in].60
[.024 in]2.54
[.100 in]27.94
[1.100 in]DATE CODE
(MONTH-YEAR)

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: GOLD
- RATING: SWITCH: 25mA @ 24VDC
CARRY: 100mA @ 50VDC
- OPERATING LIFE: 2,000 CYCLES, EACH CIRCUIT
- INSULATION RESISTANCE: 100 M Ω min. @ 500VDC
- DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL.
- OPERATING FORCE: 1,000gf MAX.
- OPERATING TEMP: -40°C to 85°C
- CONTACT RESISTANCE: INITIAL: 50m Ω TYP. @ 2-4VDC @ 100mA
- ▲ 12. PART SUPPLIED WITH ALL POLES IN THE "OFF" POSITION.
- ▲ 13. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101036	UPDATE PRINT	06/24/22	JS	TITLE KAP1112E				000017041
					SCALE	DATE	DR	DWG	REV
					2:1	9/7/2017	RC	N411122	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED