

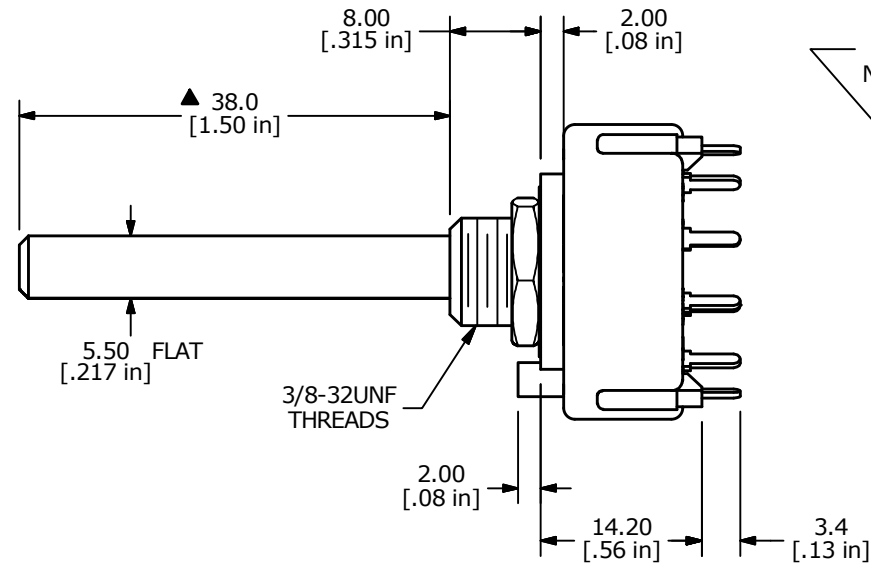


CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

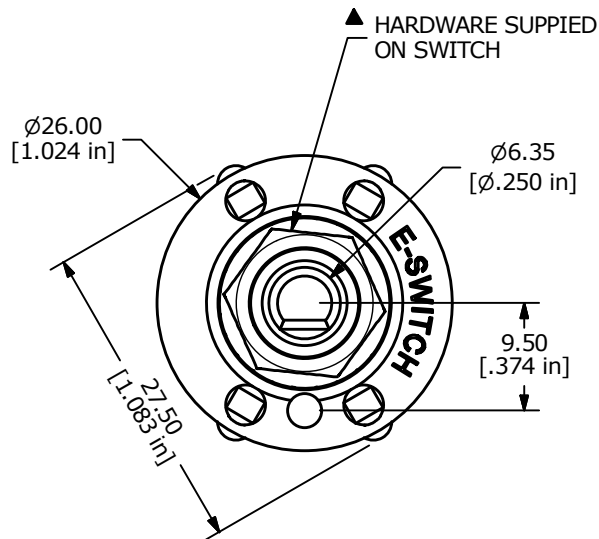


TERMINAL #9
FOR SUPPORT
NON-FUNCTIONAL



NOTE:

1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER ALLOY
5. CONTACT RATING: 0.3A @125 VAC
6. OPERATING FORCE: 800 $\pm$ 300gf-cm
7. OPERATING TEMP: -30°C TO 85°C
- ▲ 8. CIRCUIT SP: 6 POSITION 30° INDEX.
9. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN
- ▲ 10. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT, STOP RING
11. 2011/65/EU (ROHS) COMPLIANT
12. PACKAGING: 1,000PCS PER CARTON
13. ▲ DENOTES CRITICAL PARAMETER.

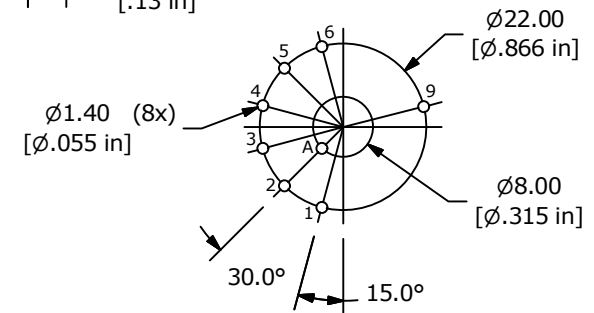

C	23825	corrected pcb layout	3/29/19	MW
B	15455	ADDED PACKAGING INFORMAION	10/26/05	PH
A	15417	RELEASED FOR PRODUCTION	10/24/05	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE KC16A38.001NPS

SCALE 1.5:1	DATE 10/24/2005	DR PH	DWG G510732	REV C
----------------	--------------------	----------	----------------	----------