


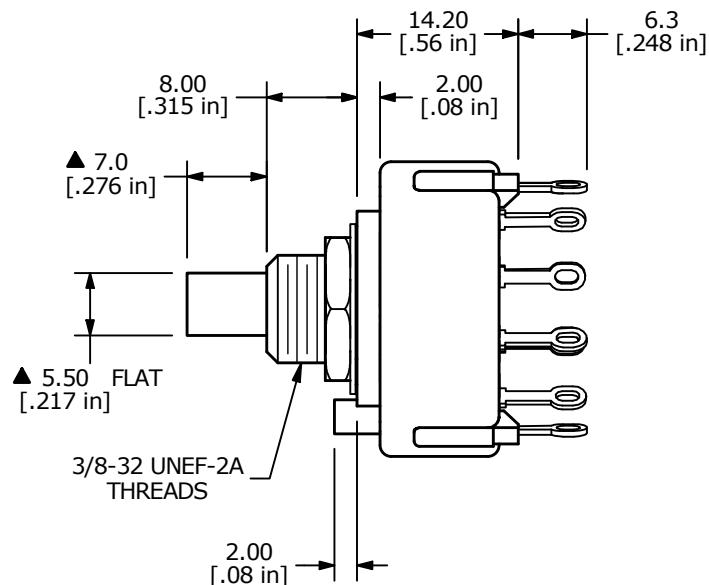


CONTACT CONFIGURATION
TIMING (BBM) NON-SHORTING

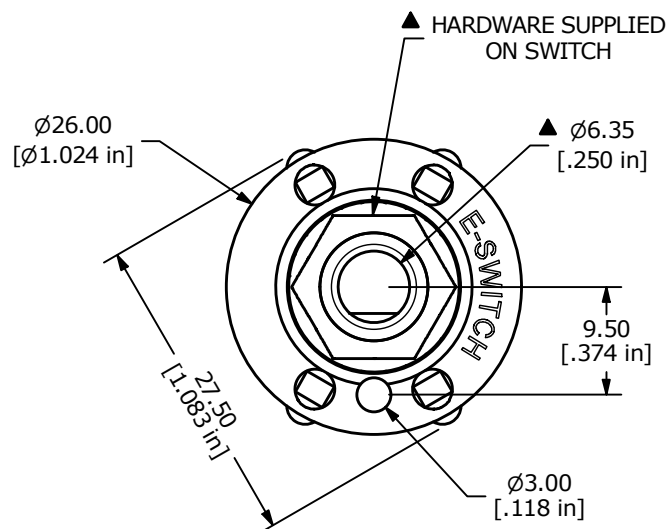

NOTE:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 0.3A @ 125VAC
6. CONTACT RATING: (NON-SWITCHING) 5A
7. OPERATING FORCE: $.8 \pm .3$ kg-cm
8. OPERATING TEMP: -30°C to 85°C
- ▲ 9. CIRCUIT SP: 7 POSITION 30° INDEX.
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
- ▲ 11. HARDWARE SUPPLIED ON SWITCH:
LOCKWASHER, HEXNUT and STOP RING
12. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100327	update print and remove chamfer from Actuator	09/02/21	MW	TITLE KC17A7.001NLS				000012668
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					3:2	12/5/2002	CJB	G527676	C