


PANEL CUTOUT





PANEL THICKNESS	(x)
1.0 - 1.5	46.0 +0.1/-0
1.5 - 2.5	46.4 +0.1/-0

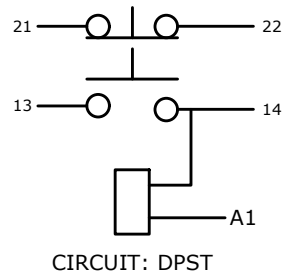

CIRCUIT: DPST

NOTE:

1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATINGS:
20(20)A @ 127VAC 1E5 T85/55 UL(UL61058)
20(20)A @ 127VAC 1E5 T85/55 TUV(EN61058)
127VAC 50/60Hz
6. CALIBRATION VOLTAGE:
USE: 100V - 120V @ 50/60Hz
RELEASE: 30V - 85V
7. ELECTRICAL LIFE 100,000 CYCLES
8. INSULATION RESISTANCE: 10M Ω MIN. @ 500VDC
9. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
10. OPERATING TEMPERATURE: 0°C TO 85°C (HOUSING)
0°C TO 55°C (ACTUATOR)
11. STORAGE TEMPERATURE: -25°C TO 85°C
12. INGRESS PROTECTION: IP55 TO PANEL
13. CONTACT RESISTANCE: 50 m Ω MAX. @ 50VAC INITIAL
14. ▲ DENOTES CRITICAL PARAMETER

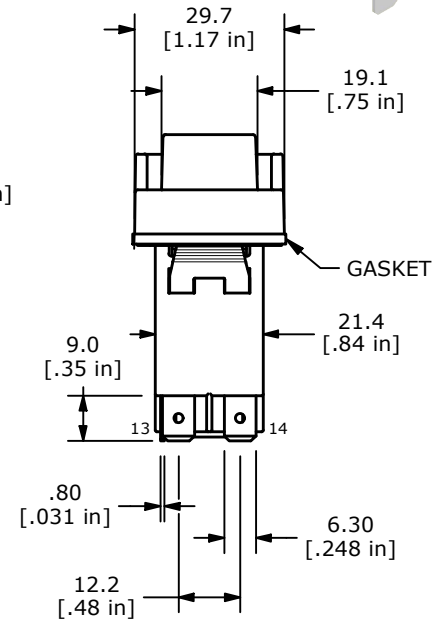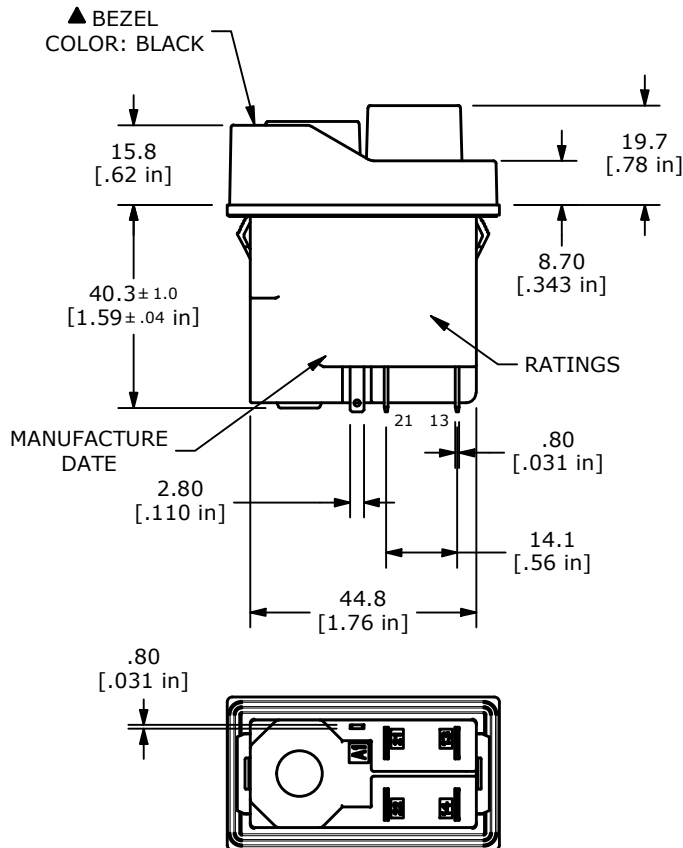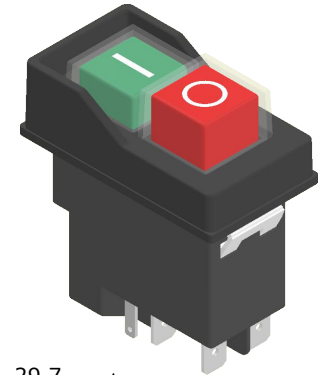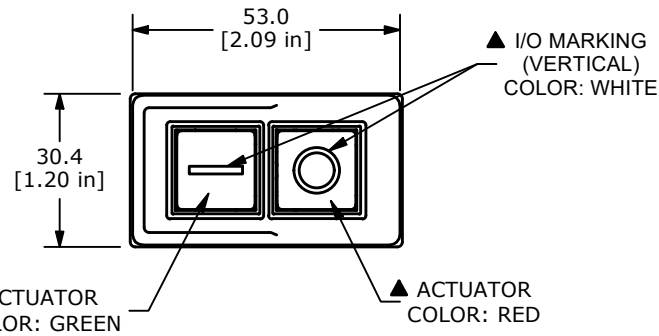

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103248	UPDATE RATINGS	03/27/25	JS	TITLE KJE32231111				100128811
					SCALE	DATE	DR	DWG	REV
					2:3	11/12/2024	JS	34-KJE32231111	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED