


PANEL CUTOUT






PANEL THICKNESS	(x)
1 - 1.5	46 +0.1/-0
1.5 - 2.5	46.4 +0.1/-0



CIRCUIT: DPST

NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- CONTACT RATINGS:
20(20)A @ 127VAC 1E5 T85/55 UL(UL61058)
20(20)A @ 127VAC 1E5 T85/55 TUV(EN61058)
127VAC 50/60Hz
- CALIBRATION VOLTAGE:
USE: 100V - 120V @ 50/60Hz
RELEASE: 30V - 85V
- ELECTRICAL LIFE 100,000 CYCLES
- INSULATION RESISTANCE: 10MΩ MIN. @ 500VDC
- DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
- OPERATING TEMPERATURE: 0°C TO 85°C (HOUSING)
0°C TO 55°C (ACTUATOR)
- STORAGE TEMPERATURE: -25°C TO 85°C
- INGRESS PROTECTION: IP55 TO PANEL
- CONTACT RESISTANCE: 50 mΩ MAX. @ 50VAC INITIAL
- ▲ DENOTES CRITICAL PARAMETER

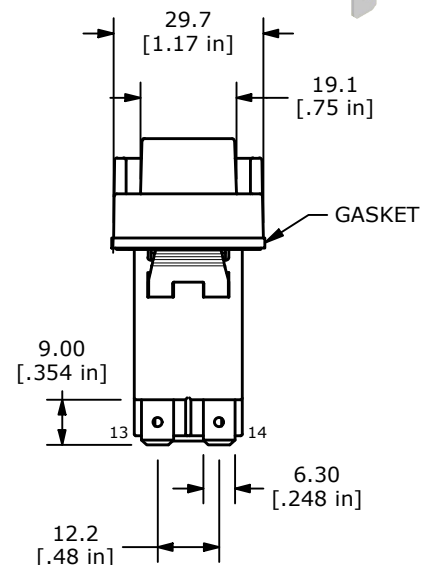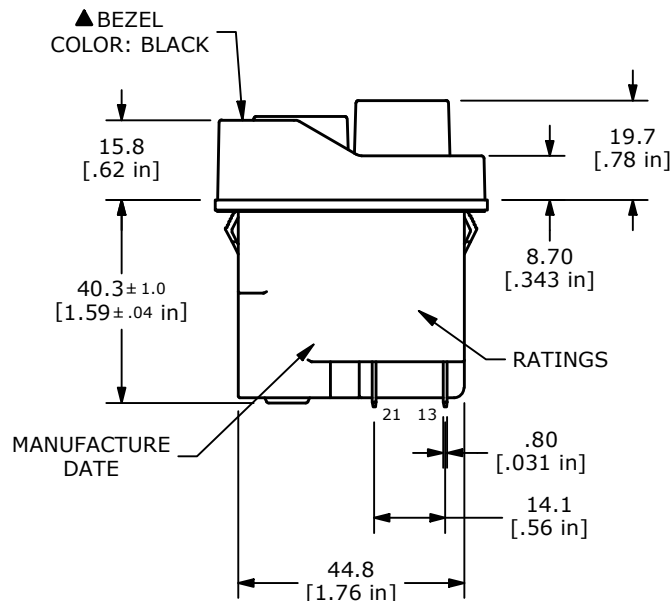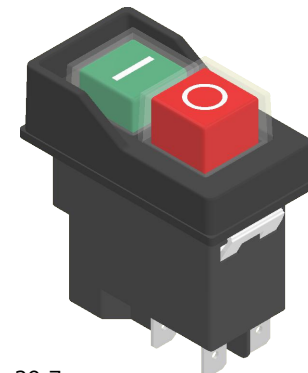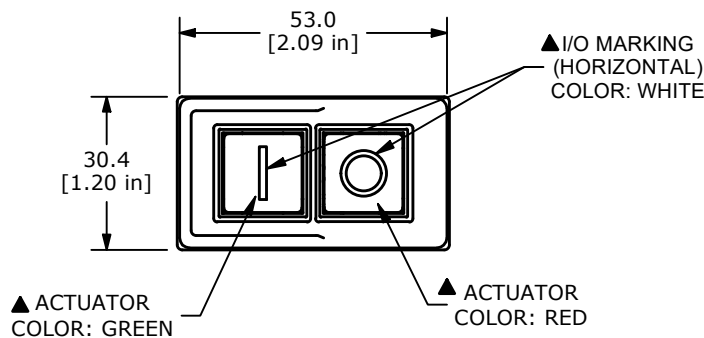

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103248	UPDATE RATINGS	03/27/25	JS	TITLE KJE32241211				100128775
					SCALE 2:3	DATE 11/7/2024	DR JS	DWG 34-KJE32241211	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED