
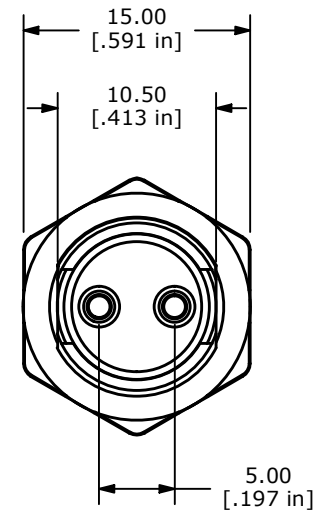
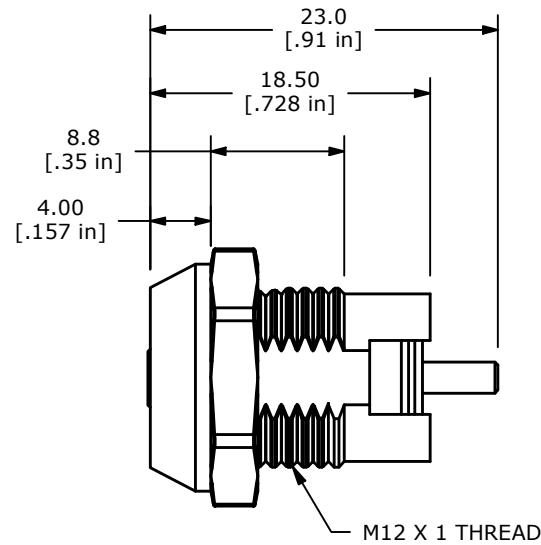


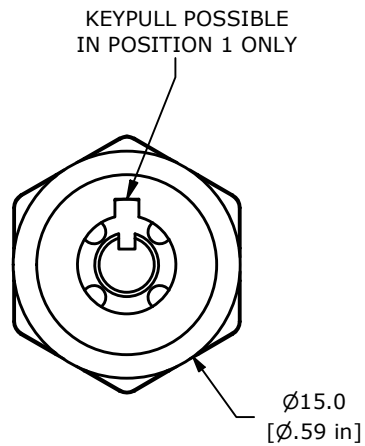


NOTES:

1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: X.X= ± 0.4
X.XX= ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 1A @125VAC, 0.5A @250VAC
5. CONTACT RESISTANCE: 20mΩ MAX.
6. DIELECTRIC STRENGTH: 1,500 V @SEA LEVEL


▲ 7. MATERIALS:

HOUSING: ZINC ALLOY W/CHROME PLATING
CYLINDER: ZINC ALLOY W/CHROME PLATING
TERMINAL AND CONTACTS: SILVER PLATED
KEYS (2) KEY CODE 1001: STEEL, NICKEL PLATING

8. ▲ DENOTES CRITICAL PARAMETER.



RECOMENDED PANEL CUTOUT



CIRCUIT: SPDT
CONTACT CONFIGURATION
90° INDEXING

SWITCH FUNCTION	
POS 1	POS 2
↑	→
OFF	ON

LEGEND

⊙ = INDICATES KEY PULL POSSIBLE

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102378	UPDATE SWITCH TO CURRENT STANDARDS	12/07/23	JS	TITLE KO105C1001				000015288
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	3/28/2014	EBP	K100310	B