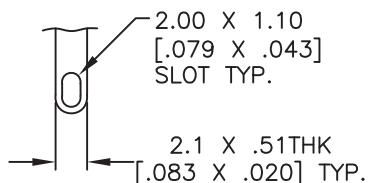
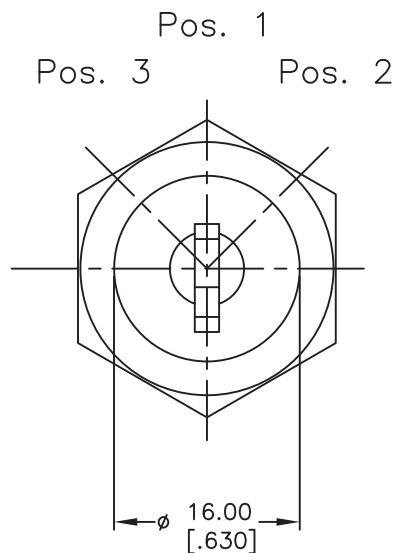


RECOMMENDED PANEL LAYOUT


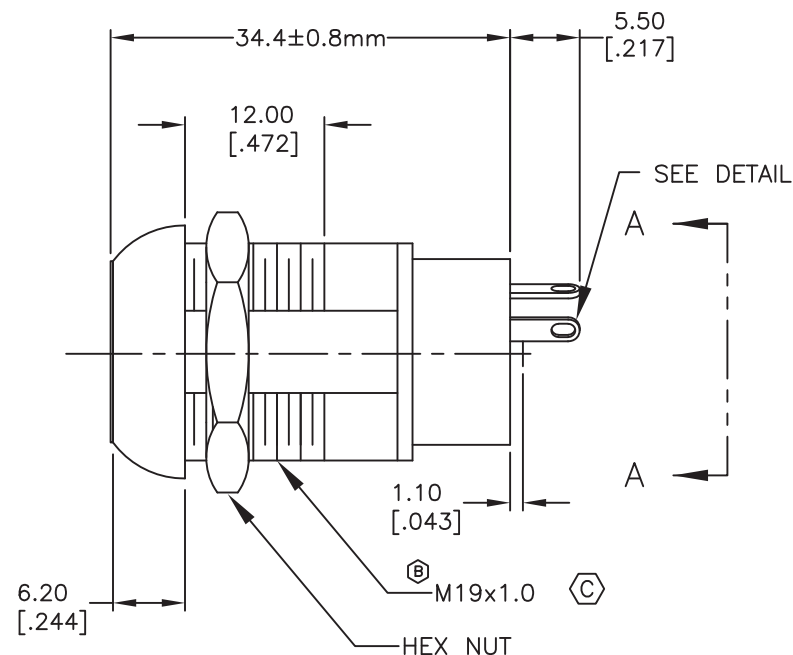
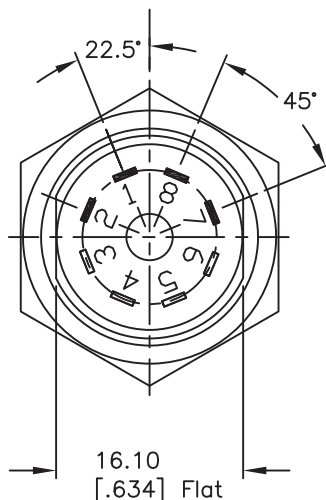
TERMINAL DETAIL
SCALE 2X

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
- DIELECTRIC STRENGTH: 1KV RMS min. at sea level
- ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
- MATERIALS:
CONTACTS: Silver Plated CU (Q Contact material)
TERMINALS: Silver Plated Cu (Q Contact material)
MOUNTING NUT: Nickel Plated zinc alloy
CONTACT SPRING: Piano Wire
KEYS: (QTY. 2) Brass with code no. A126
LOCK: Bright NI plated zinc alloy with NI facing
TUMBLER Mechanism: 4-disc tumbler cylinder.
- 2002/95/EC (ROHS) COMPLIANT.



Pos. 1 Ref.

CIRCUIT: SP (45° INDEXING)
CONTACT CONFIGURATION

SWITCH FUNCTION		
CONNECTED TERMINAL #		
POS. 1	POS. 2	POS. 3
8-1	1-2	8-7

LEGEND

- = Detent Positions (45°)
- ⊙ = Key pull possible in these positions
- ▲ = MOMENTARY POS.

OBJECT ID: 000015434

D	101829	34.4 +/-0.8 WAS 34.40	4/12/23	JS
C	19509	CHANGED THREAD DESCRIPTION	1/22/09	BLR
B	18385	CORRECT THREAD SPEC (WAS M12)	1/22/09	BLR
A	11566	RELEASED FOR PRODUCTION	7/12/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED



TITLE

K0129C-A126

SCALE

1:1

DATE

1/22/09

DR

CB

DWG

K200209

REV

D