
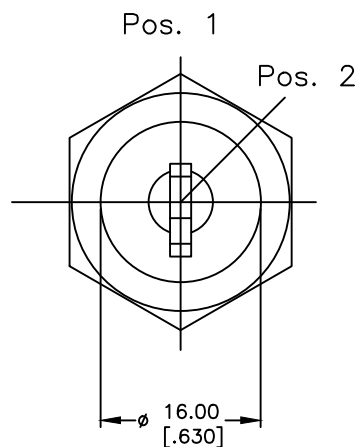


RECOMMENDED PANEL LAYOUT


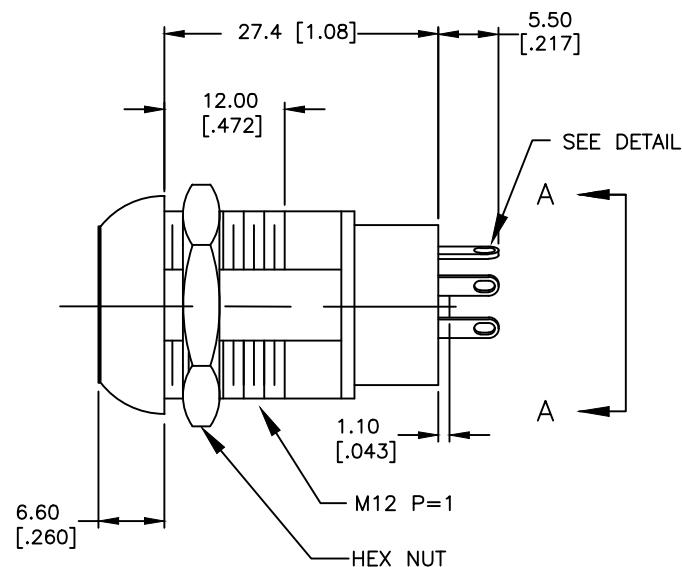
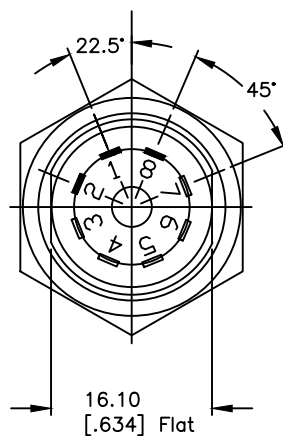
TERMINAL DETAIL
SCALE 2X

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 4A @125VAC/28VDC, 2A @250VAC
5. DIELECTRIC STRENGTH: 1KV RMS min. at sea level
6. ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.
7. MATERIALS:
CONTACTS: Silver Plated Cu (Q Contact material)
TERMINALS: Gold Flash Plated Cu
MOUNTING NUT: Nickel Plated zinc alloy
CONTACT SPRING: Piano Wire
KEYS: (QTY. 2) Brass with code no. A126
LOCK: Bright NI plated zinc alloy with NI facing
TUMBLER Mechanism: 4-disc tumbler cylinder.



Pos. 1 Ref.

CIRCUIT: DP (45° INDEXING)
CONTACT CONFIGURATION

SWITCH FUNCTION	
CONNECTED TERMINAL #	
POS. 1	POS. 2
8-1	1-2

LEGEND

- =Detent Positions (45°)
- ⊙ =Key pull possible in these positions
- ▲ =MOMENTARY POS.

D	101763	PRINT UPDATE	3/22/23	MW
C	21037	TERMINAL PLATING WAS SILVER	2/14/13	EBP
B	13688	CORRECT SWITCH FUNCTION	1/9/04	AR
A	11566	RELEASE FOR PRODUCTION	8/5/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

K0129E-A126

SCALE

1:1.5

DATE

8/5/02

DR

CB

DWG

K200309

REV

D