



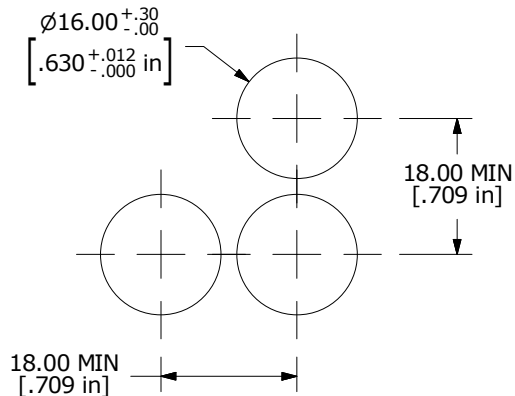



RECOMMENDED PANEL MOUNTING
PANEL THICKNESS: 5.0 (.197 in) max.

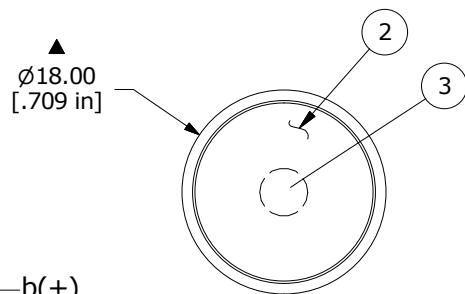

a—L—b(+)

CIRCUIT

- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 4. OPERATING TEMP: -25°C to +55°C
 5. STORAGE TEMP: -40°C TO +85°C
 - ▲ 6. LAMP VOLTAGE: 110VAC NEON GREEN
 7. SEAL: PROTECTED TO IP40.
 8. PANEL THICKNESS: 0.5 - 5.0 mm
 9. PACKAGE: 20 PER BOX
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. 2002/95/EC (ROHS) COMPLIANT.

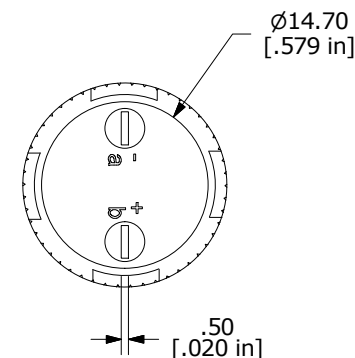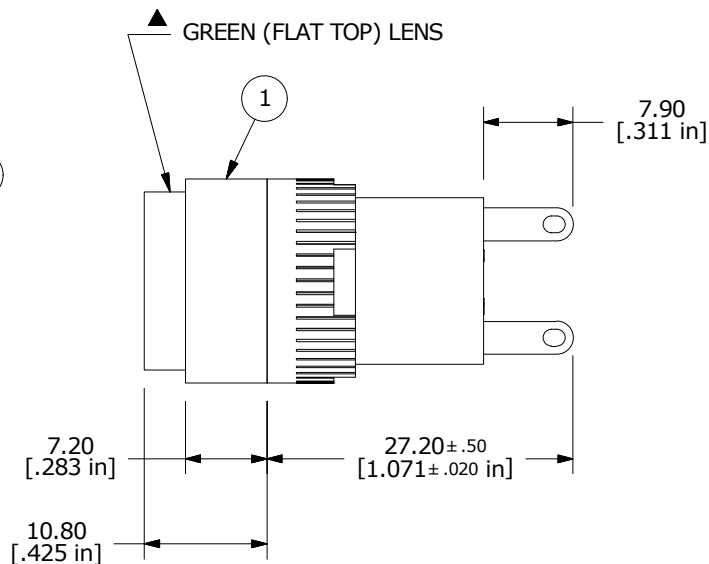

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040003	L16PL10 BODY
2	1	F050112	50-001-12 GREEN FLAT TRANSPARENT LENS (ROUND)
3	1	F050411	50-004-11 GREEN NEON 110VAC



TITLE L16PLR10FGRNGRN

SCALE 3:2

DATE 4/8/2015

DR MW

DWG XF0897P

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED