




Item	Qty.	Dwg. No.	Part No.
1	1	FO40002	L16 PLS10
2	1	FO50422	50-004-22 GRN L.E.D.
3	1	FO50312	50-003-12 GRN LENS TRANSPARENT

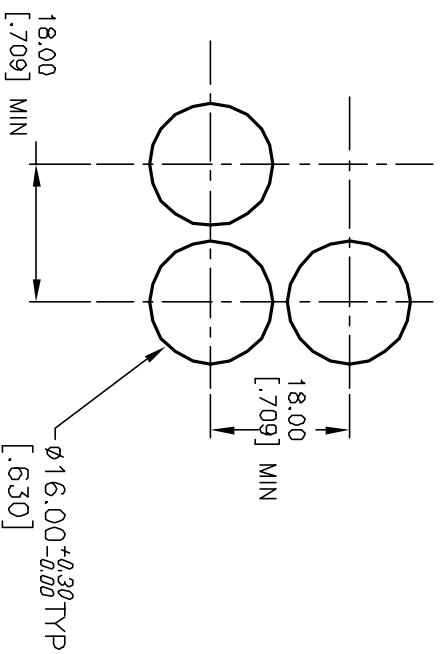

RECOMMENDED PANEL LAYOUT

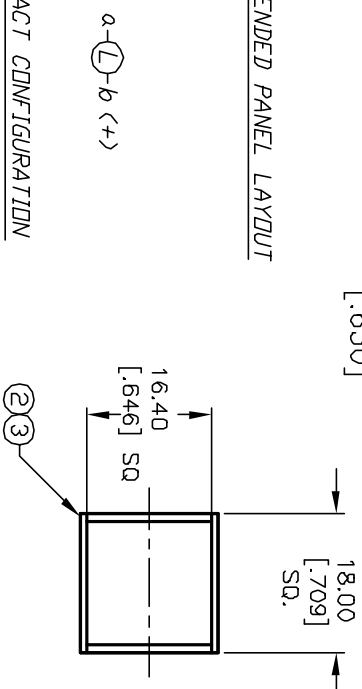

CONTACT CONFIGURATION

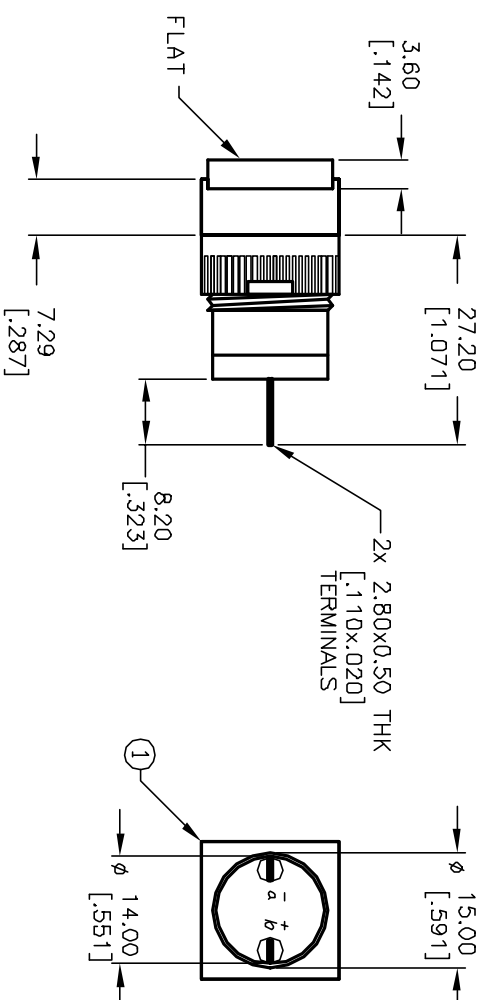

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A @250V AC
8A @125V AC
- LAMP VOLTAGE: 24V DC LED
5. MECHANICAL LIFETIME: >2 MILLION OPERATIONS
6. CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATING

6. CONTACT MATERIAL. COPPER ALLOY W/SILVER PLATING				
A	12439	RELEASED FOR PRODUCTION	9/20/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

E-SWITCH®				
TITLE				
L16 PL S10 K RED RED				
SCALE	DATE	DR	DWG	REV
1:1	9/20/02	CB	XF0508P	A