






Item	Qty.	Dwg. No.	Part No.
1	1	F051701	29mm RING FOR LA SERIES
2	1	F060618	LASEEU14
3	1	F060295	29mm RED LENS OPAQUE

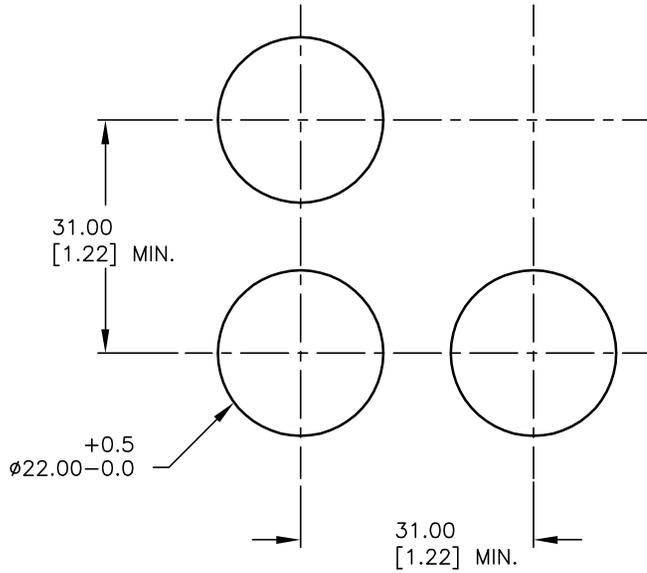

RECOMMENDED PANEL MOUNTING

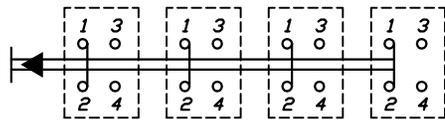

4PST CONTACT CONFIGURATION

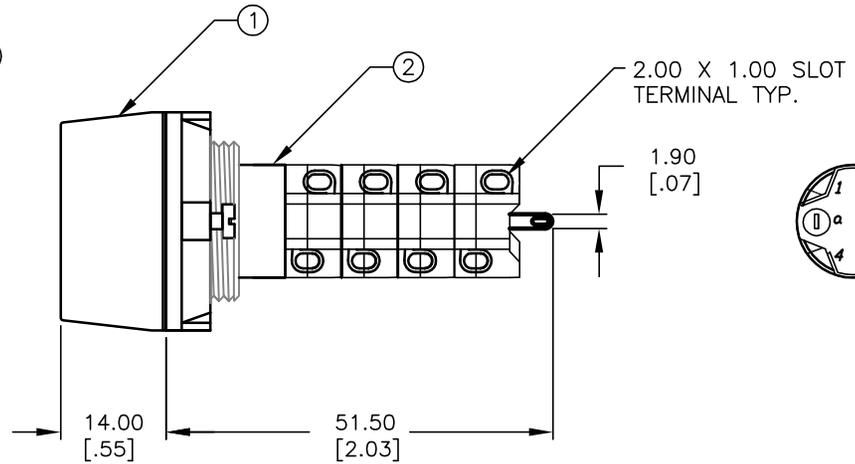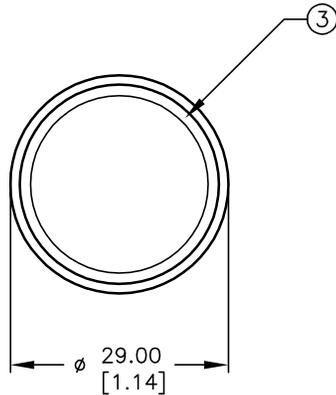

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
- RATINGS: 5A@250V AC,  
8A@125V AC
- CONTACT MATERIAL: COPPER ALLOY W/Gold Plating
- MECHANICAL LIFE: >100,000 Cycles
- ELECTRICAL LIFE: >50,000 Cycles
- INSULATION RESISTANCE: >1000 MILLI-OHMS
- OPERATING TEMP: -20°C to 55°C
- LAMP VOLTAGE: NO LAMP

**E-SWITCH®**

A	14054	RELEASED FOR PRODUCTION	6/2/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE					LASEEU14RED				
SCALE	1:1	DATE	6/2/04	DR	AR	DWG	XF0590P	REV	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED