

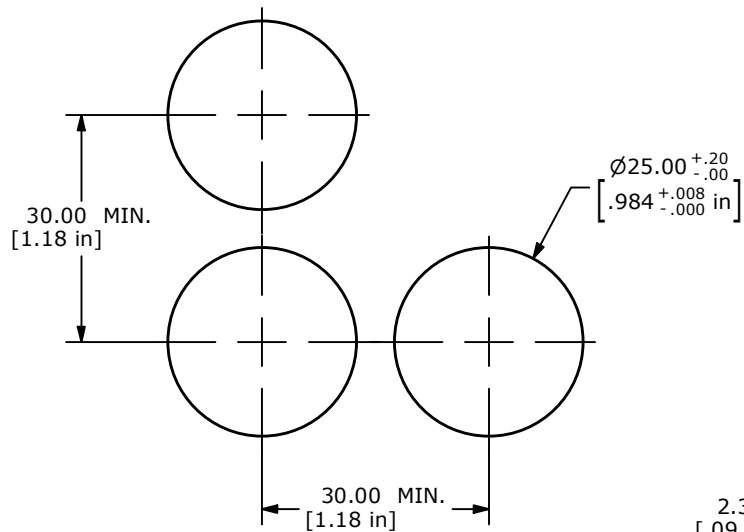

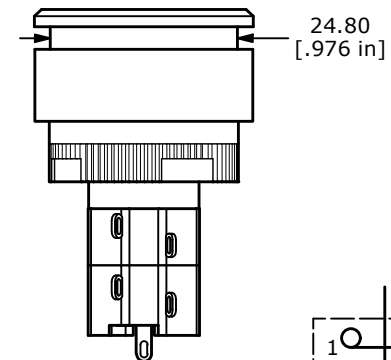



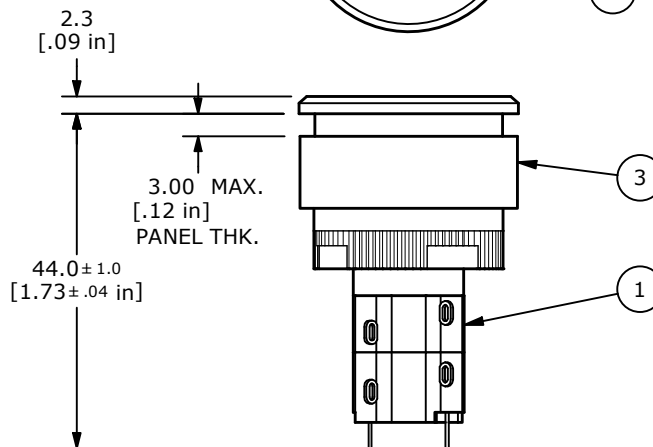

RECOMMENDED PANEL MOUNTING

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REF. ONLY.
4. RATING: 5A @250VAC
8A @125VAC
0.2A @250VDC
6A @24VDC
5. INSULATION: 1,000 M Ω MIN.
6. DIELECTRIC STRENGTH: 2000V FOR 1 MIN.
7. SEALED TO IP65
8. TRAVEL: 3.0mm FULL TRAVEL, 2.0mm LATCHING
9. ELECTRICAL LIFE: >50,000 CYCLES
10. OPERATING TEMP: -25C to +55C
11. PANEL THICKNESS: 0.5mm to 3.0mm
- ▲ 12. LAMP VOLTAGE: LED 6V DC GREEN
13. ▲ DENOTES CRITICAL PARAMETER.
14. PACKAGE: BOX/10 PCS PER.

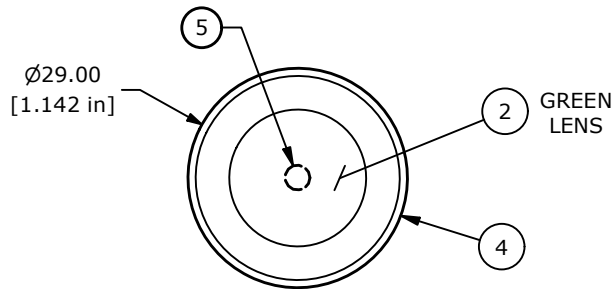


a ○ L ○ b (+)

▲ DPDT

CONTACT CONFIGURATION

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060603	LASEEV12
2	1	F060202	25mm GREEN LENS
3	1	F051705	29mm FLUSH MOUNT RETAINER
4	1	F051704	29mm FLUSH MOUNT BEZEL
5	1	F050416	LED 6VDC GREEN

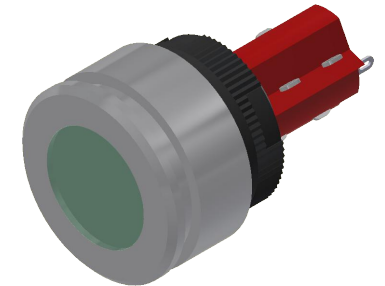

REV	ECO NO	DESCRIPTION	DATE	BY	OBJECT ID			
D	ECO-102356	print update	11/20/23	MW	000027951			
					TITLE LASEEV32HGRNGRN			
					SCALE 1:1	DATE 5/15/2008	DR BLR	DWG XF0749P
					REV D			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED