






Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060610	LASOAU11 (MOMENTARY)
2	1	F051701	29MM RING FOR LA SERIES
3	1	F060294	29MM GREEN LENS
4	1	F060250	29MM LA U1 NUT

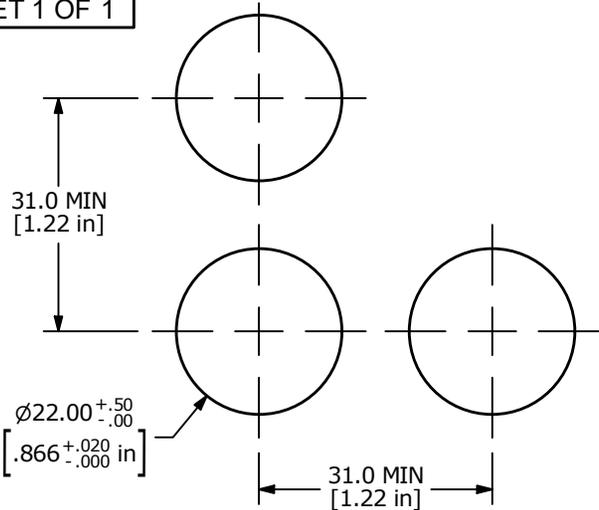

RECOMMEND PANEL MOUNTING  
(MAX. PANEL THK. 4mm)



▲  $\phi 29.00$   
[1.14 in]

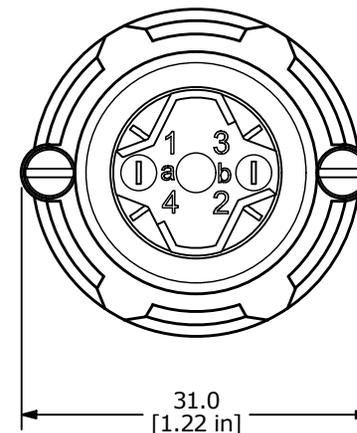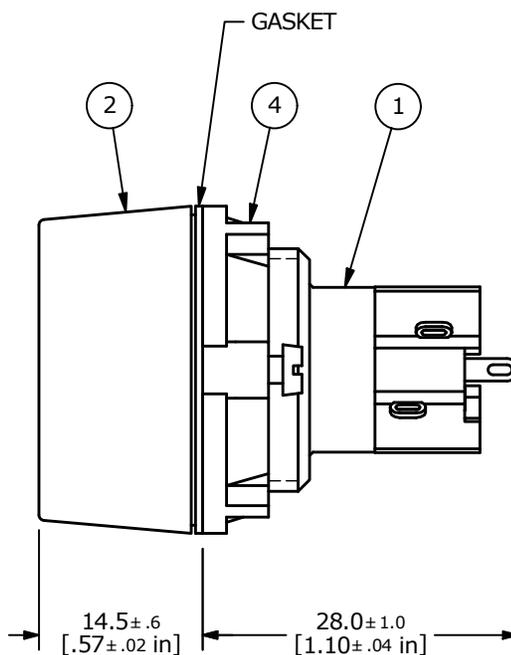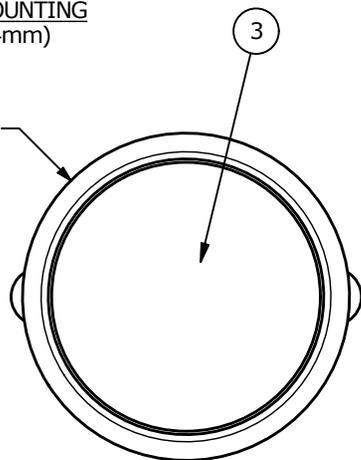

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @ 250VAC, 8A @ 125VAC  
0.2A @ 250VDC, 6A @ 24VDC
5. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 70°C
8. LAMP VOLTAGE: NO LAMP
9. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-101457	update print	12/16/22	MW



OBJECT ID  
000027576

TITLE LASOAU110GRN				
SCALE 3:2	DATE 1/25/2001	DR AR	DWG XF0349P	REV B