








RECOMMEND PANEL MOUNTING
(MAX. PANEL THK. 4mm)

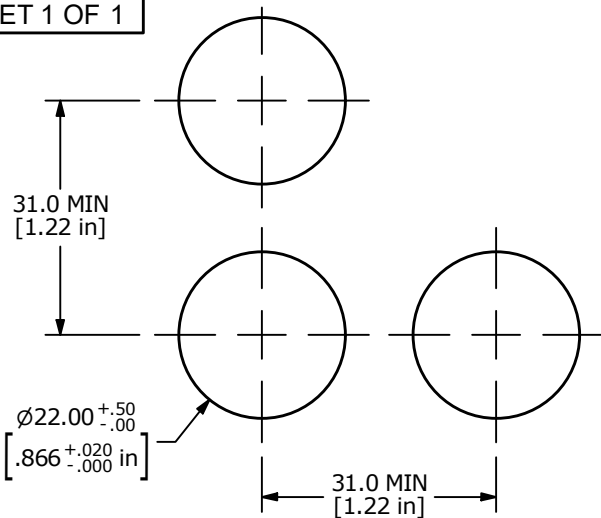

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F060610	LASOAU11 (MOMENTARY)
2	1	F051701	29MM RING FOR LA SERIES
3	1	F060295	29MM RED LENS
4	1	F060250	29MM LA U1 NUT



▲ Ø29.00
[1.14 in]

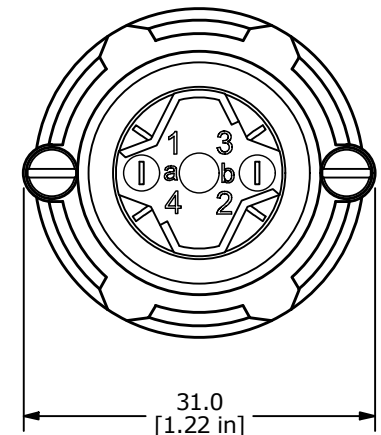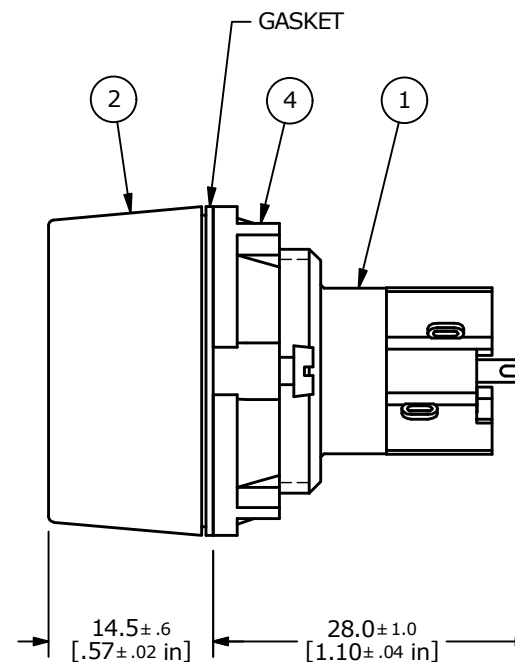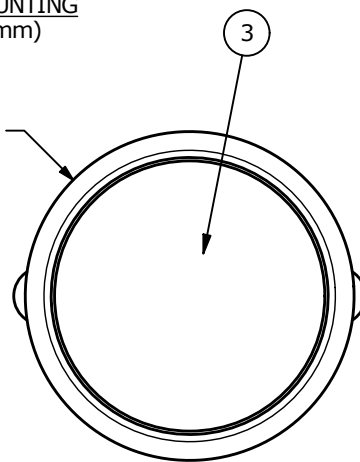

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @ 250VAC, 8A @ 125VAC
0.2A @ 250VDC, 6A @ 24VDC
5. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 70°C
- ▲ 8. LAMP VOLTAGE: NO LAMP
9. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-101457	update print	12/16/22	MW	TITLE LASOAU110RED				000027575
					SCALE	DATE	DR	DWG	REV
					3:2	1/25/2001	AR	XF0348P	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED