
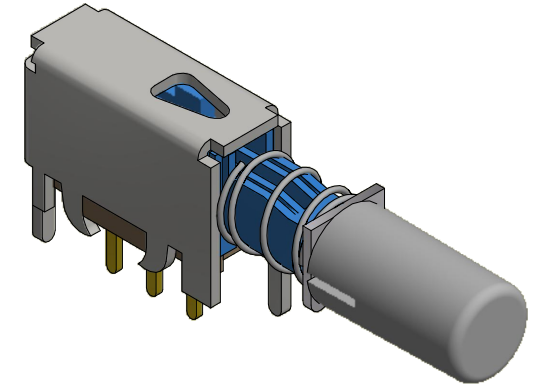
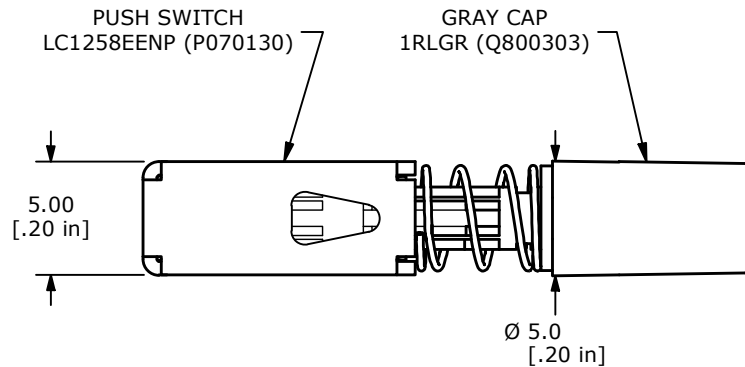
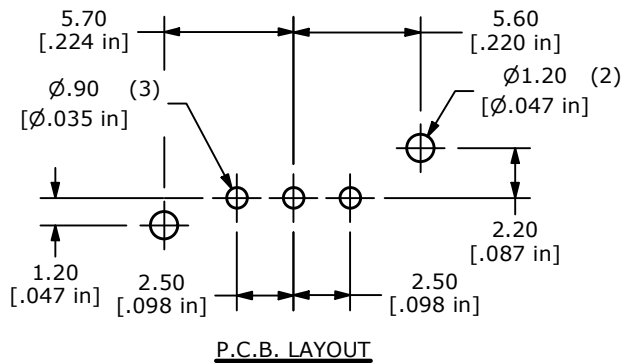
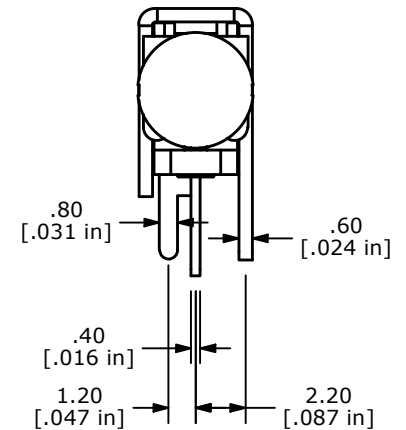


CIRCUIT: SPDT
NON-SHORTING

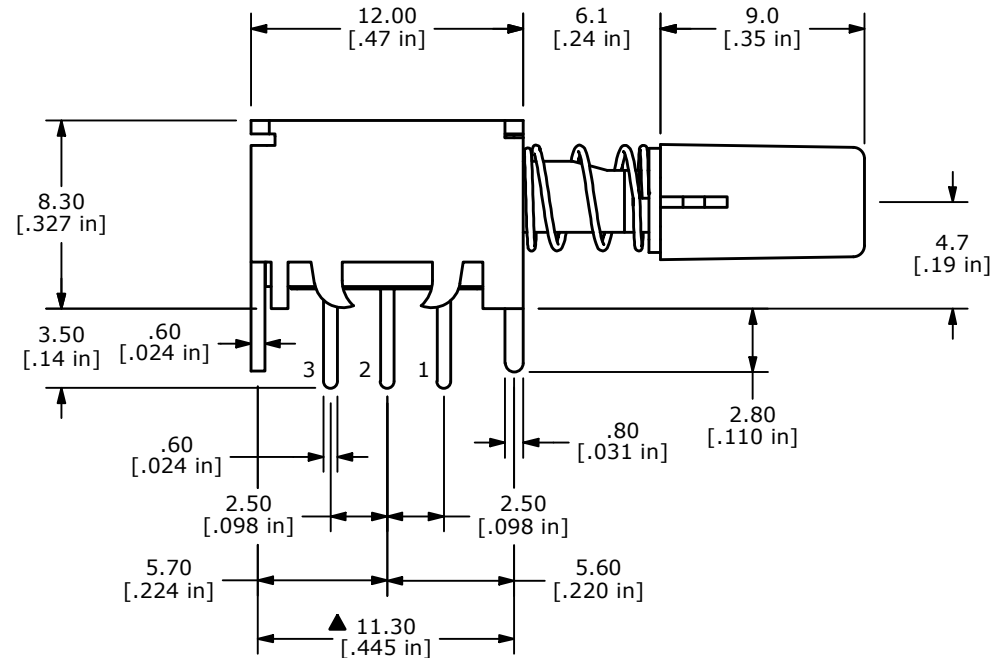

NOTES:

1. ALL DIMENSIONS IN MM.
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
- ▲ 4. RATING: DC 30V, 0.3A
- ▲ 5. ACTUATION FORCE: $230 \pm 100\text{gf}$
6. TRAVEL: 3.5mm TO MAKE
2.5mm TO LOCK
7. ▲ DENOTES CRITICAL PARAMETER.

A	23922	RELEASED	6/28/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE LC1258EENP1RLGR

SCALE
3:1

DATE
6/6/2019

DR
MW

DWG
XP0110P

REV
A