

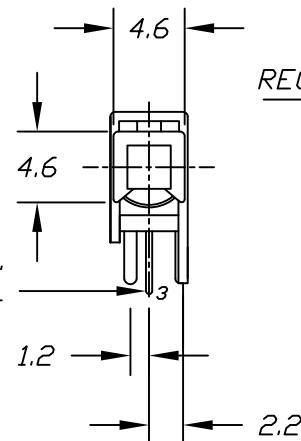
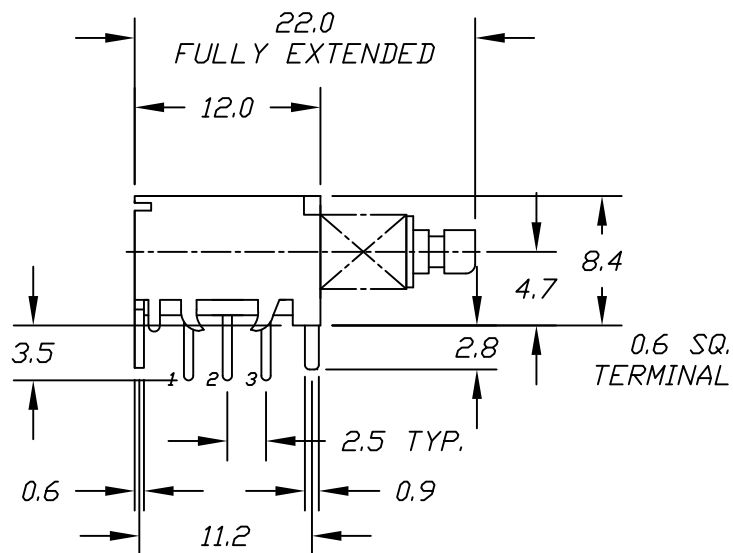

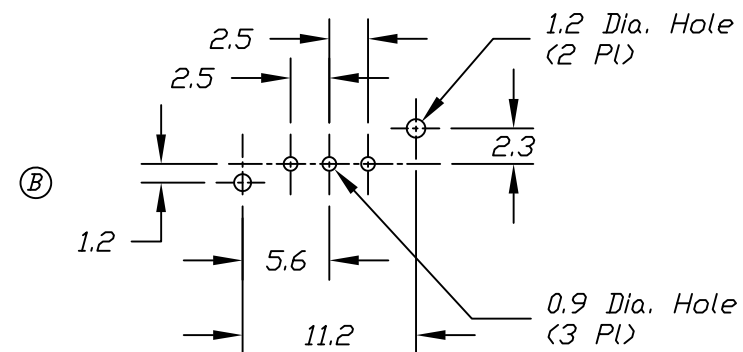
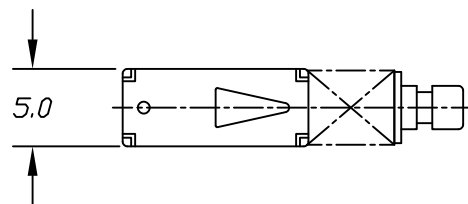



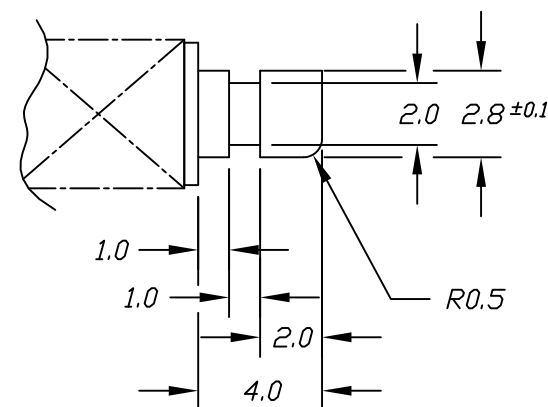

RECOMMEND P.C.B. LAYOUT

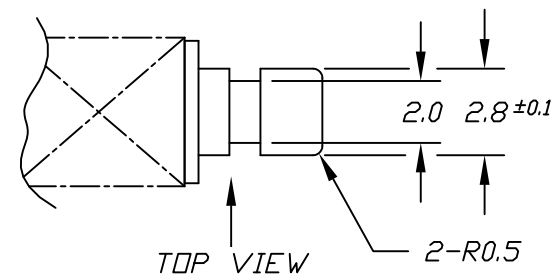

CIRCUIT: SPDT

CONTACT CONFIGURATION

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: DC 30V, 0.3A
- CONTACT MATERIAL:
PHOSPHOR BRONZE W/ SILVER PLATING
- CONTACT RESISTANCE: 20 milli-Ohms max.
- DIELECTRIC STRENGTH: 1,000V rms@ Sea Level
- OPERATING FORCE: 230±100gf
- TRAVEL : FULL 3.5mm; LOCK 2.5mm

- (B)

B	12310	REVISED AND REDRAWN	7/19/02	CB
A	10499	RELEASED FOR PRODUCTION	1/18/02	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

LC 1258 EE SP (LATCHING)

SCALE

2:1

DATE

1/18/00

DR

MM

DWG

P070226

REV

B