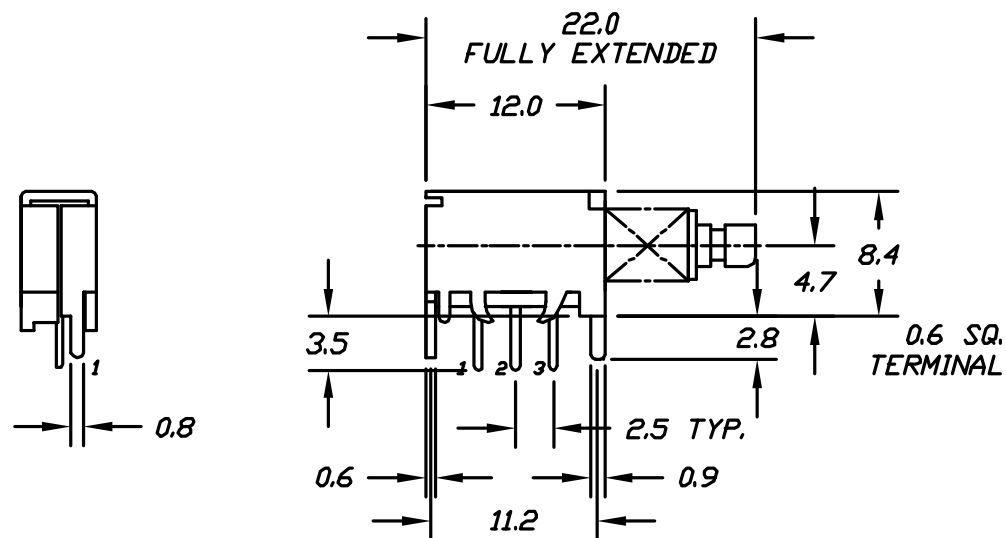
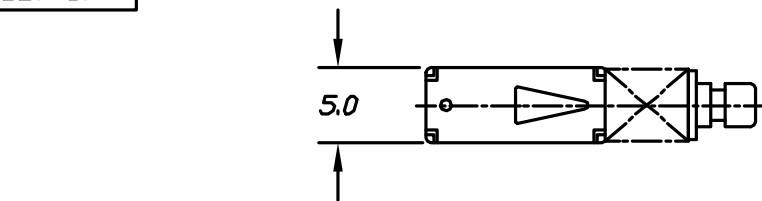
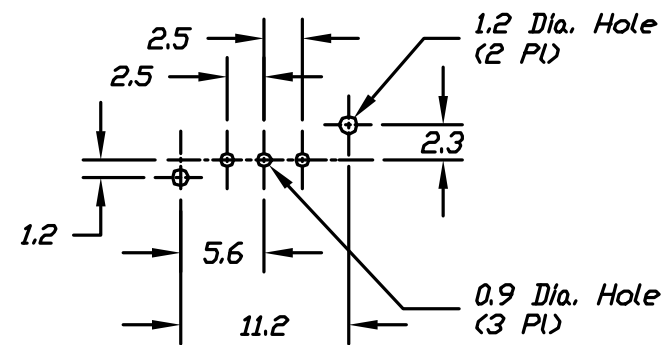
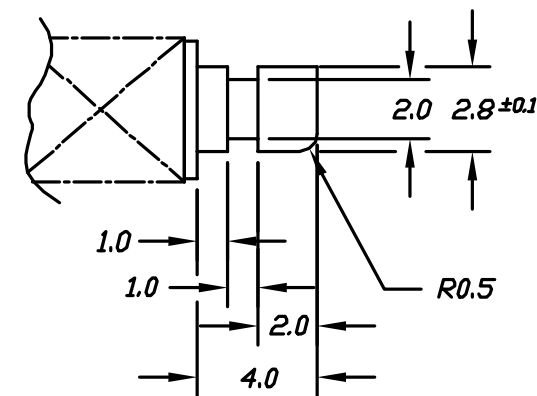
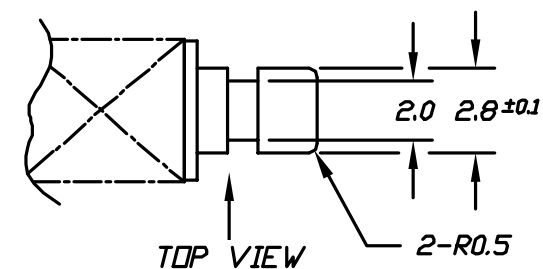
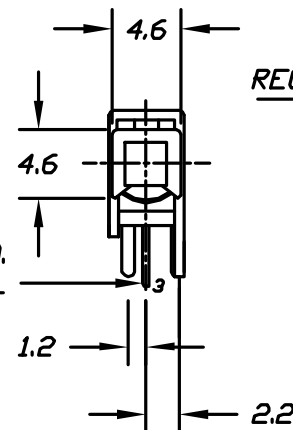


CIRCUIT: SPDT

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: DC 30V, 0.3A
5. CONTACT MATERIAL:
PHOSPHOR BRONZE W/ SILVER PLATING
6. CONTACT RESISTANCE: 20 milli-Ohms max.
7. DIELECTRIC STRENGTH: 1,000V rms @ Sea Level
8. OPERATING FORCE: 230±100gf
9. TRAVEL : FULL 3.5mm

RECOMMEND P.C.B. LAYOUT(ACTUATOR DETAIL) SCALE 4:1**E-SWITCH®**

TITLE

LC 1258DA SP (Momentary)

SCALE

2:1

DATE

1/18/00

DR

MM

DWG

P070227

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	12310	RELEASED FOR PRODUCTION	7/19/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD