



RECOMMEND P.C.B. HOLES






CIRCUIT: DPDT

CONTACT CONFIGURATION

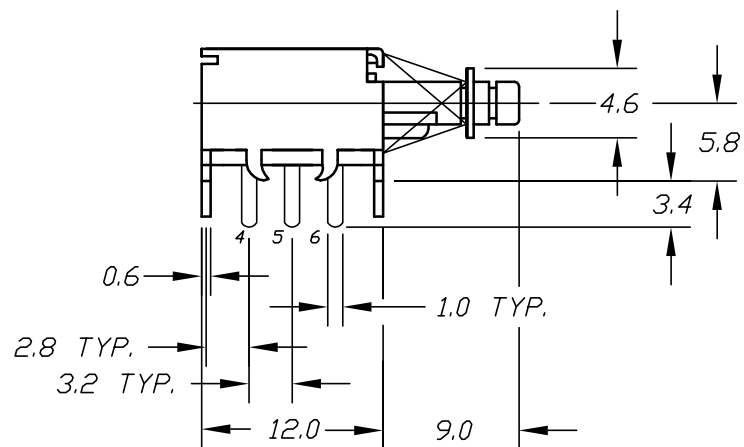

NOTES:

1. ALL DIMENSIONS IN MM [IN]
2. TERM. NDS. FOR REF ONLY
- ③ 3. GENERAL TOLERANCE: 0 ± 0.4 ; 0 ± 0.25
- ③ 4. RATING: 0.3A @30VDC; 1A @18VAC
- ③ 5. ELECTRIC LIFE: 10,000 CYCLES MINIMUM AT BOTH LOADS
6. OPERATING FORCE: $330 \pm 150 \text{gf}$
7. TRAVEL: FULL 3.5mm; LOCK 2.5mm

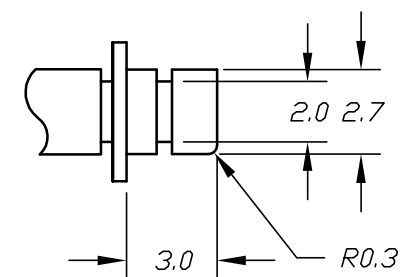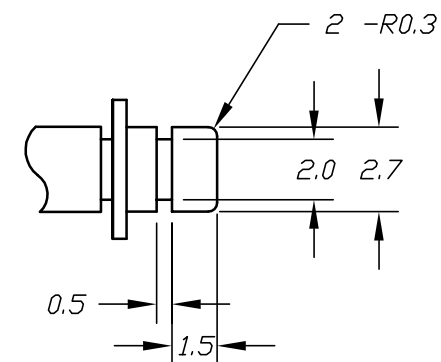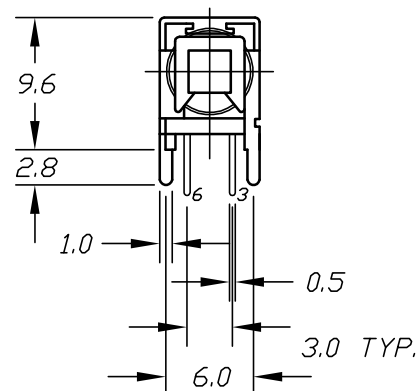

(ACTUATOR DETAIL) SCALE 4:1

E-SWITCH®

TITLE

LC 2254 EE N P

SCALE

2:1

DATE

12/06/96

DR

MM

DWG

P070160

REV

B

B	10994	NOTES ADDED	10/09/00	PML
A		RELEASED FOR PRODUCTION	12/06/96	MM
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED