
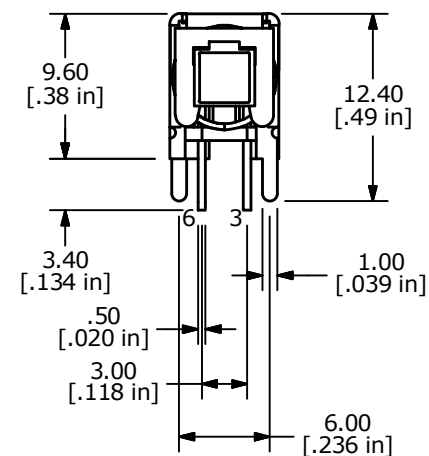
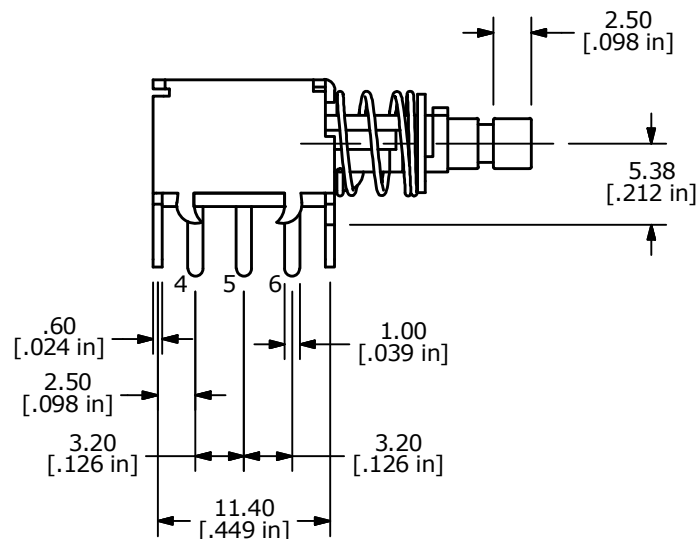

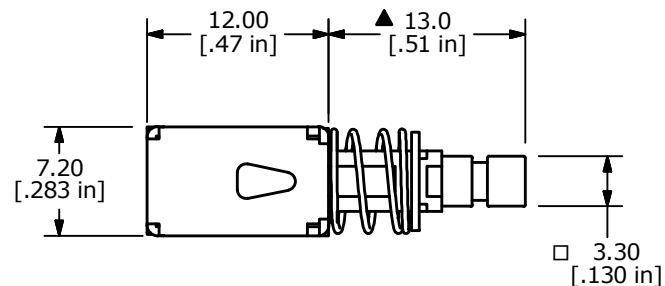



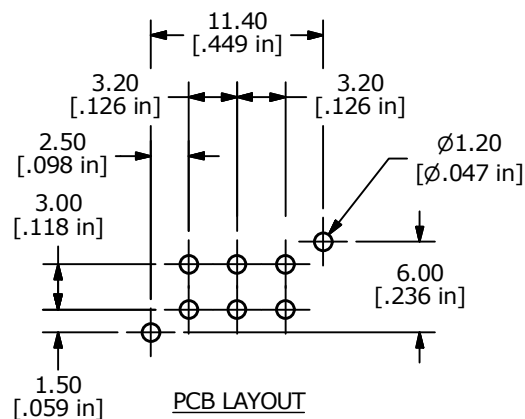

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: x.x = $\pm 0.4\text{mm}$
x.xx = $\pm 0.25\text{mm}$
 3. RATING: 300mA @ 30VDC
 - ▲ 4. OPERATING FORCE: $300 \pm 150\text{gf}$
 5. TRAVEL: 3.5mm TO MAKE
2.5mm TO LOCK
 6. LIFE CYCLES: 10,000 CYCLES
 7. OPERATING TEMPERATURE: -20°C to 80°C
 8. CONTACT RESISTANCE: $200\text{m}\Omega$ MAX.
 9. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN.
 10. ▲ DENOTES CRITICAL PARAMETER.

C	23912	drawing update	6/5/19	MW	 E-SWITCH®			
B	15819	EDIT PLUNGER LENGTH	2/23/06	PH				
A	15750	RELEASE	2/9/06	PH	TITLE LC2255EENP			
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE	DATE	DR	REV
					2:1	2/9/2006	PH	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE

2:1

DATE

2/9/2006

DR

PH

DWG

P070180

REV

C