



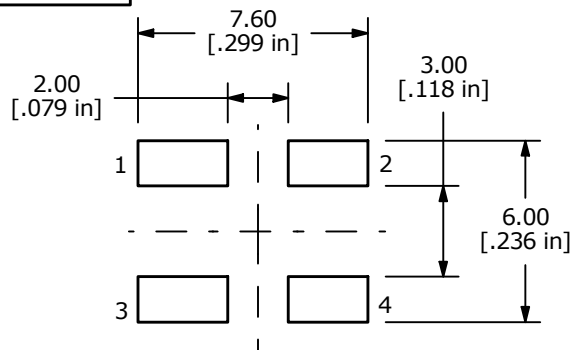




P.C.B. LAYOUT



CIRCUIT DIAGRAM

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 70 ±30 GRAMS
6. TRAVEL: 0.25 +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. LIFE CYCLES: 1,000,000 CYCLES
- ▲ 9. CONTACT MATERIAL: SILVER
- ▲ 10. PACKAGE: 750 PIECES PER POLY BAG
11. ▲ DENOTES CRITICAL PARAMETER
12. OPERATING TEMP -40°C TO 85°C

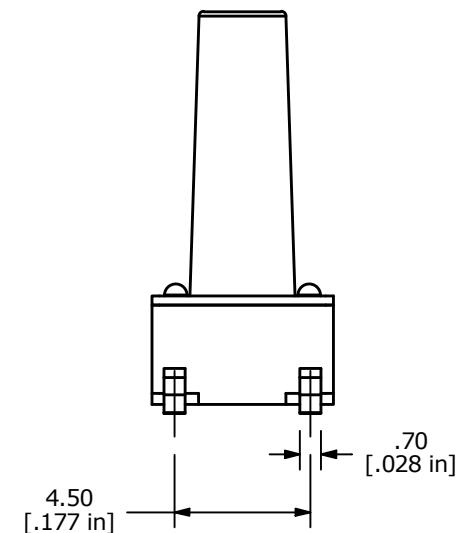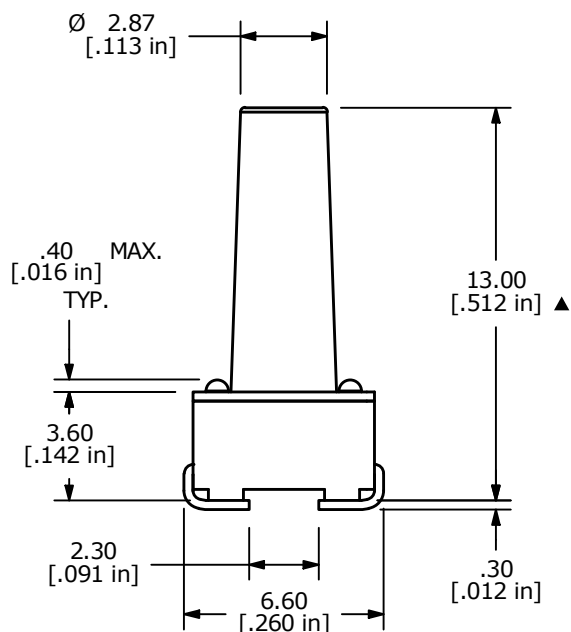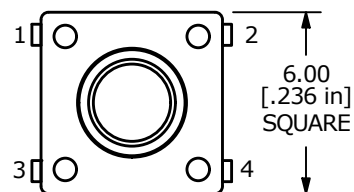

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101779	NOTE 5: 70+/-30 WAS 65 GRAMS	04/17/23	JS	TITLE LL3301DF065QJ				000017817
					SCALE	DATE	DR	DWG	REV
					4:1	11/22/2006	TN	P010454	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED