






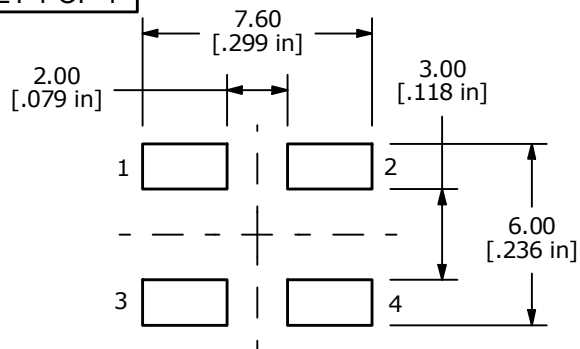


P.C.B. LAYOUT



## NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 70±30 GRAMS
6. TRAVEL: 0.25mm +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. LIFE CYCLE: 1,000,000 CYCLES
- ▲ 9. SILVER CONTACTS
- ▲ 10. PACKAGE: POLYBAG/750 PIECES PER
11. ▲ DENOTES CRITICAL PARAMETER
12. OPERATING TEMP -40°C TO 85°C

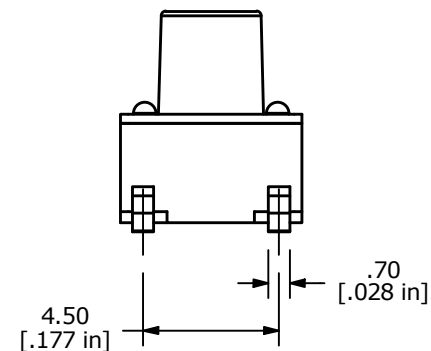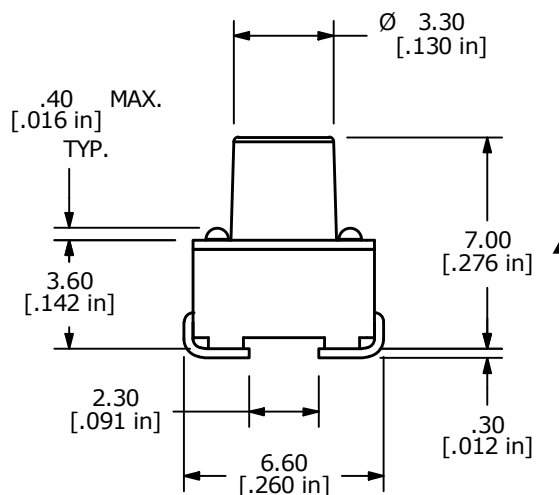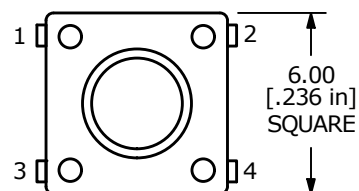

| REV | ECO NO     | DESCRIPTION                   | DATE     | BY | E-SWITCH®           |           |    |         | OBJECT ID |
|-----|------------|-------------------------------|----------|----|---------------------|-----------|----|---------|-----------|
| D   | ECO-101779 | NOTES 5: 70+/-30 WAS 65 GRAMS | 04/17/23 | JS | TITLE LL3301FF065QJ |           |    |         | 000017819 |
|     |            |                               |          |    | SCALE               | DATE      | DR | DWG     | REV       |
|     |            |                               |          |    | 4:1                 | 1/31/2007 | TN | P010456 | D         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED