

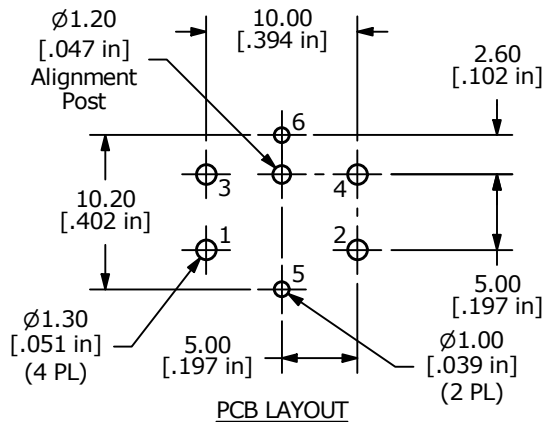


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 20VDC @ 1mA, 5VDC @ 5mA
4. CONTACT RESISTANCE: 200 Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN. @ 100VDC.
- ▲ 6. OPERATING FORCE: 125 $\pm$ 35gf
7. TRAVEL: 1.25 $\pm$ 0.3 mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 1,000,000 CYCLES
- ▲ 10. LED: WHITE
11. ▲ DENOTES CRITICAL PARAMETERS
12. CONTACT MATR'L: GOLD FLASH OVER NICKEL

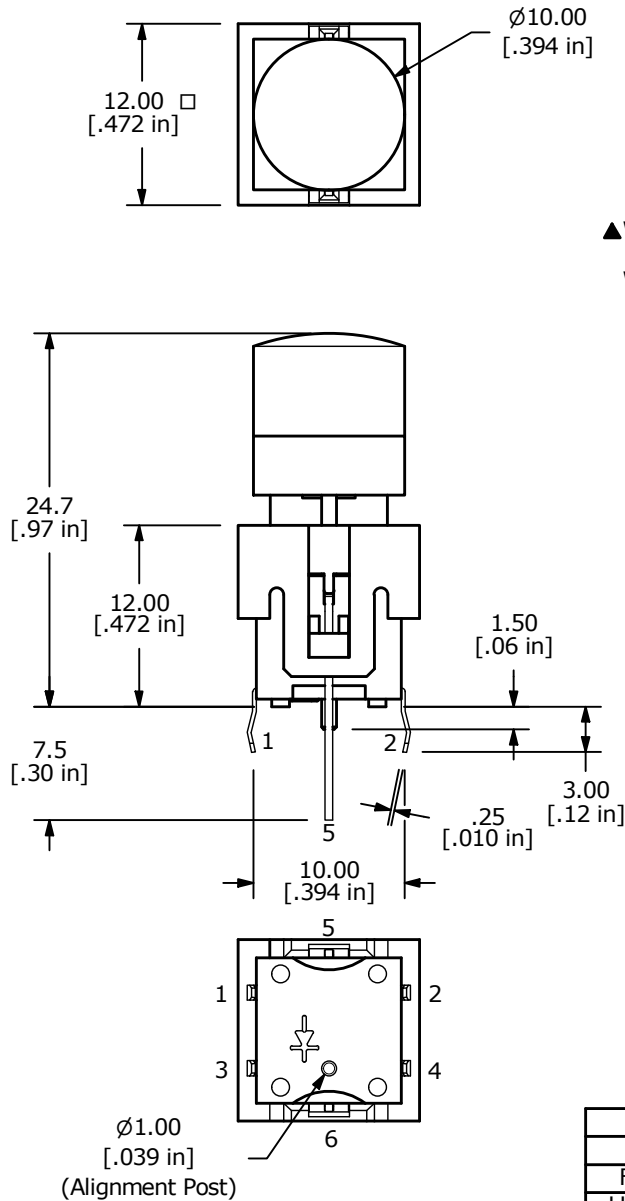

▲ WHITE CAP
with
WHITE LED

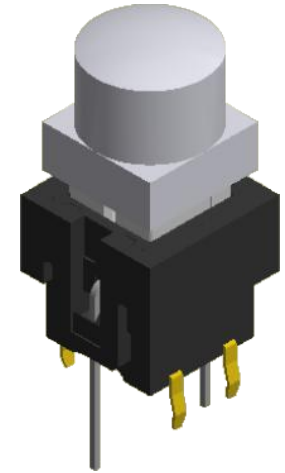

▲ LED SPECS	UNITS	WHITE	
FORWARD CURRENT	mA	20	
FORWARD VOLTAGE @ 20mA	VDC	3.3 TYP	4.0 MAX.
LUMINOUS INTENSITY @ 20mA	mcd	400 TYP.	

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®			OBJECT ID
B	ECO-101243	UPDATE TO CURRENT LED SPECS	09/22/22	JS	TITLE LP15R1WHTWHT-N			000006818
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	REV
					2:1	9/11/2017	MW	B
					DWG		REV	
					B270010		B	