


## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 20VDC, 100mA MAX; SPST
5. CONTACT RESISTANCE: 150MILLI-OHM MAX.
6. INSULATION RESISTANCE: 10MEGA-OHM MIN @500VDC.
7. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
8. OPERATING FORCE: 250± 50gf
9. OPERATING LIFE: 50,000,000 CYCLES
10. OPERATING TEMP: -5°C TO +60°C
11. STORAGE TEMPERATURE: -40°C TO +90°C
12. TOTAL TRAVEL: 3.30±0.3mm
13. TRAVEL TO ELECTRICAL MAKE: 2.9 ±0.5mm
- ▲14. LED COLOR: NO LED
15. ▲ DENOTES CRITICAL PARAMETER.

▲ GREEN CAP WITH  
WHITE DIFFUSER

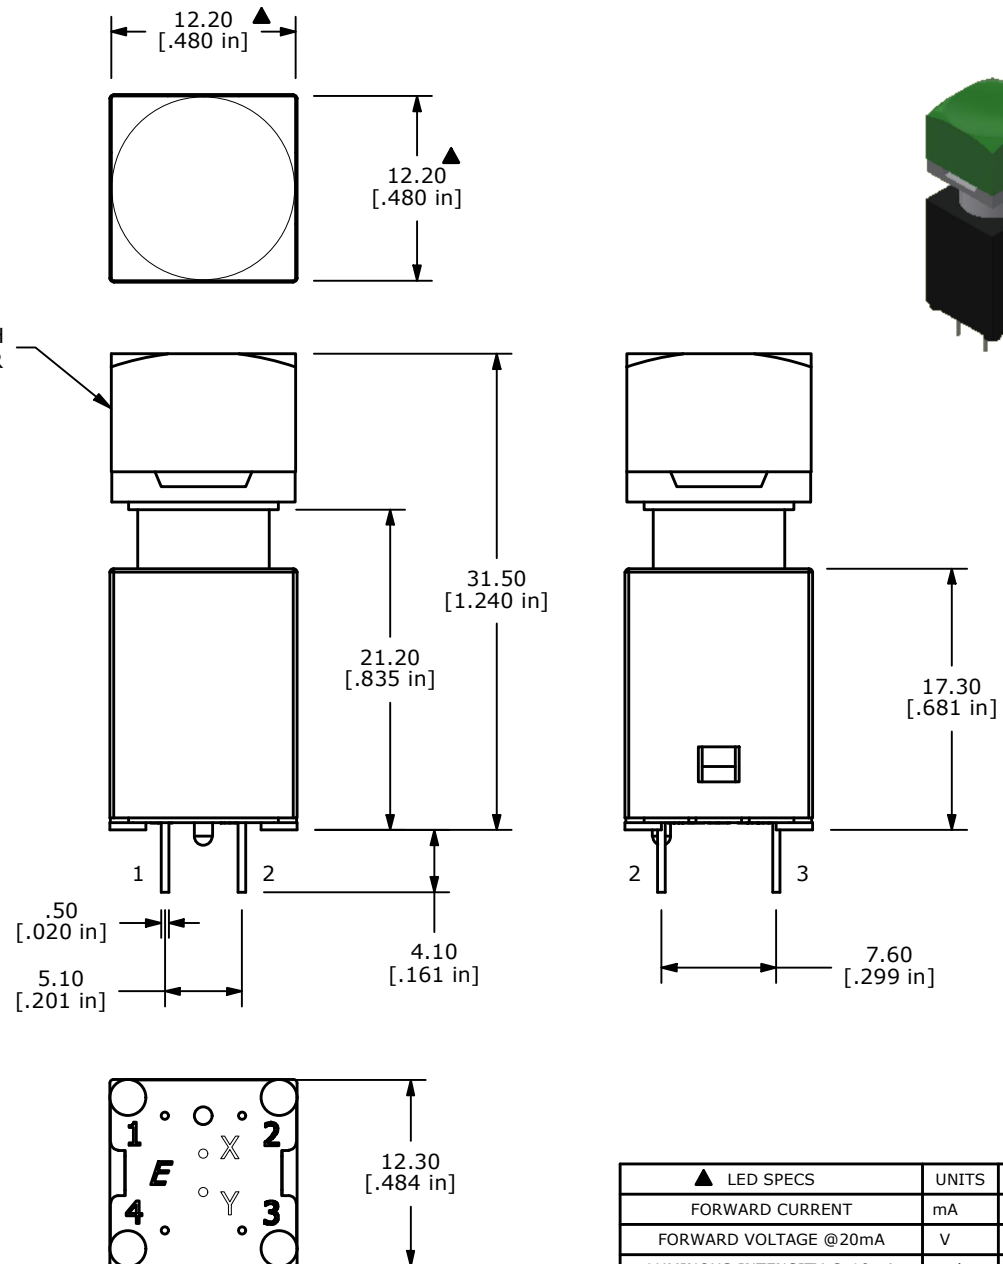

▲ LED SPECS	UNITS	
FORWARD CURRENT	mA	0
FORWARD VOLTAGE @20mA	V	0
LUMINOUS INTENSITY @ 10mA	mcd	0

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®			OBJECT ID
B	ECO-102608	REMOVE LED TERMINALS	03/22/24	JS				100126457
A	ECO-102430	RELEASE	12/22/23	JS	TITLE LP16OA1ASGWN			
					SCALE 2:1	DATE 12/18/2023	DR JS	DWG B160006
								REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED