



▲ LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @ 20mA	V	3.3 typ.
LUMINOUS INTENSITY @ 20mA	MCD	1300 typ.



T	D
1.3-2.2mm	7.7-8.3mm
2.2-3.0mm	8.3-8.9mm
3.0-3.6mm	8.9-9.2mm





RECOMMENDED CUTOUT



▲ CIRCUIT: SPST
OFF (ON)

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 30VDC @ 100mA
4. CONTACT RESISTANCE: 50m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN @ 500VDC
6. OPERATING FORCE: 250 $\pm$ 100gf
7. TRAVEL: 1.3 $\pm$ 0.3mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 50,000 CYCLES
- ▲ 10. LED: BLUE
11. ▲ DENOTES CRITICAL PARAMETERS

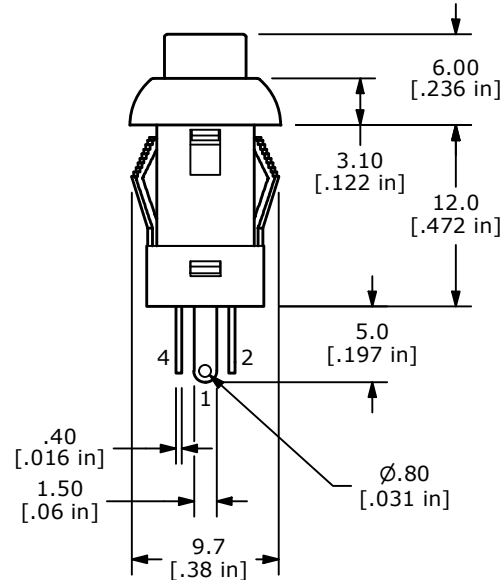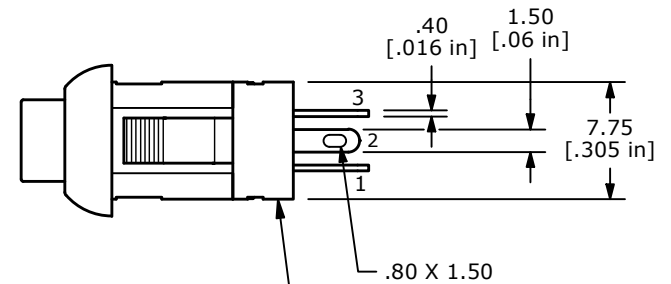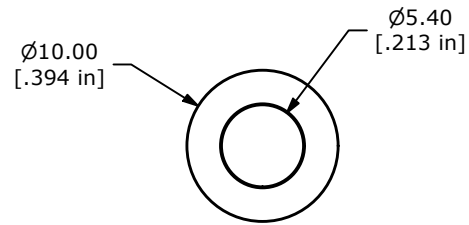

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-103267	Print update	03/18/25	MW	TITLE LP10A1AB				000006542
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	7/10/2008	rc	B200201	C