
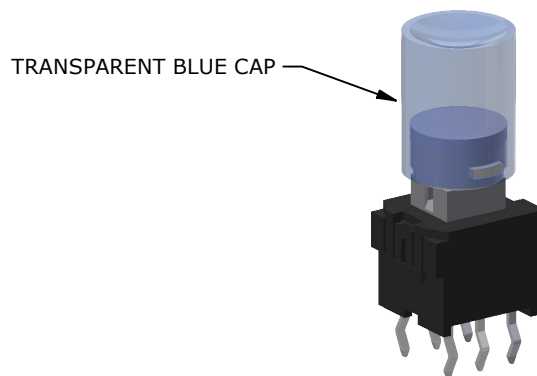
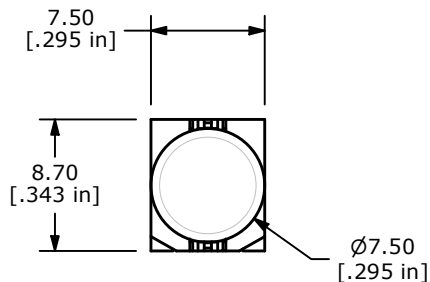
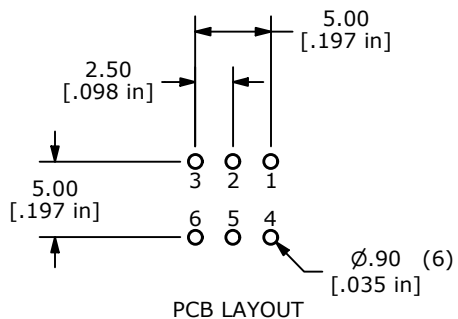

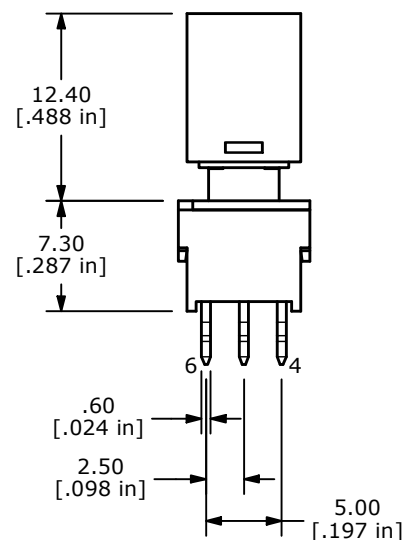


▲ **CIRCUIT DIAGRAM**
DPDT (MOMENTARY)

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: CURRENT: 100mA
VOLTAGE: 30 VDC
5. OPERATING LIFE: 50,000 MAKE-AND-BREAK CYCLES
6. INSULATION RESISTANCE: 500VDC, 100M Ω MIN.
7. OPERATING FORCE: 250gf ± 100 gf
8. OPERATING TEMP.: -40°C to 85°C
- ▲ 9. TRAVEL: 0.7 $\pm$ 0.3mm LOCK
1.8 $\pm$ 0.3mm FULL TRAVEL
10. CONTACT RESISTANCE: 50m Ω MAX.
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. LED COLOR: NON-ILLUMINATED

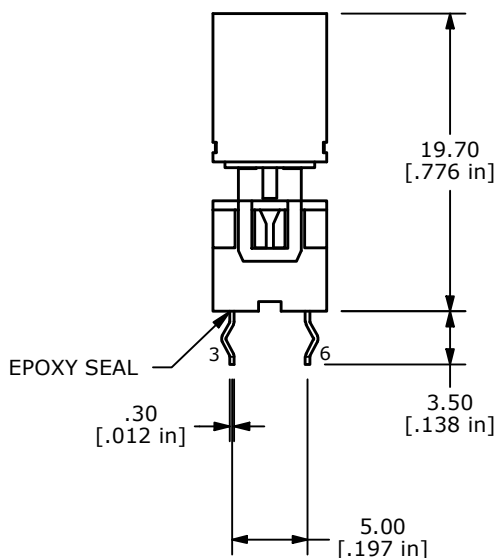

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-102728	RELEASE	05/14/24	JS	TITLE LP40A1PBCBN				100127388
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	5/8/2024	JS	B240074	A