
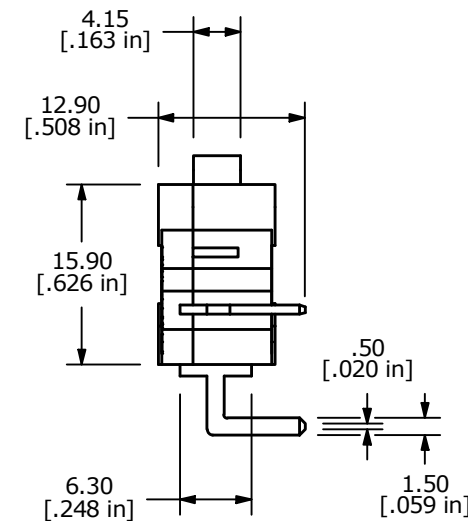
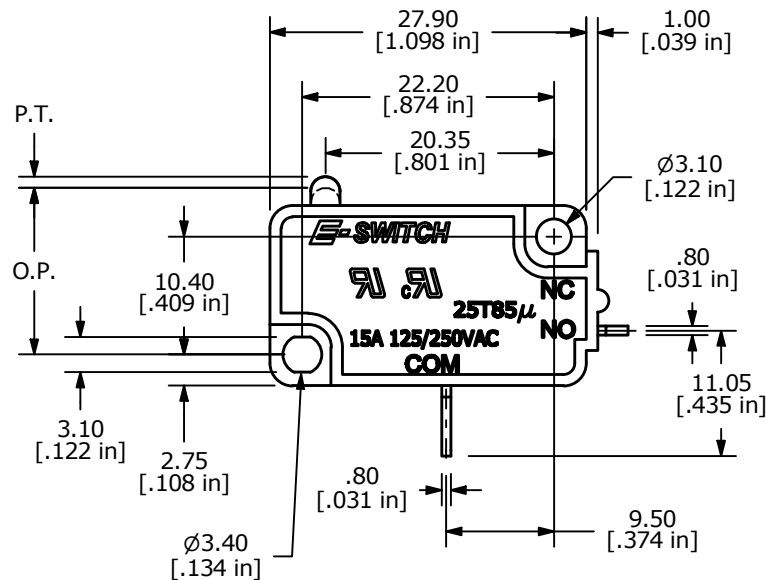


O.P. (MM)	P.T. (MM)
14.7±0.5	2.0 MAX.

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



- NOTES:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X±0.4  
X.XX±0.25
  - RATING: 15A @ 125/250VAC [UL, CUL]
  - OPERATING FORCE: 100±30 GRAMS
  - OPERATING TEMP: -25°C TO 85°C
  - ELECTRICAL LIFE: 50,000 CYCLES MIN.
  - MECHANICAL LIFE: 1,000,000 CYCLES TYP.
  - INSULATION RESISTANCE: 100 MΩ MIN. @ 500VDC
  - DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
  - CONTACT RESISTANCE: 100 mΩ MAX.
  - ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-100840	REMOVE VDE RATING AND LOGO	04/21/23	JS

OBJECT ID  
000021080

 **E-SWITCH®**

TITLE LS0851500F100V1C

SCALE	DATE	DR	DWG	REV
3:2	10/4/2011	BGL	Q950096	B